


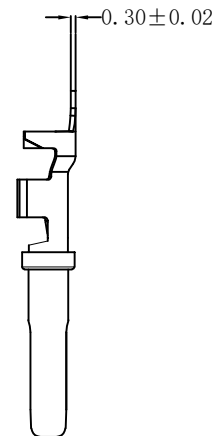


标记	设 变 内 容	日 期	修 改	核 准

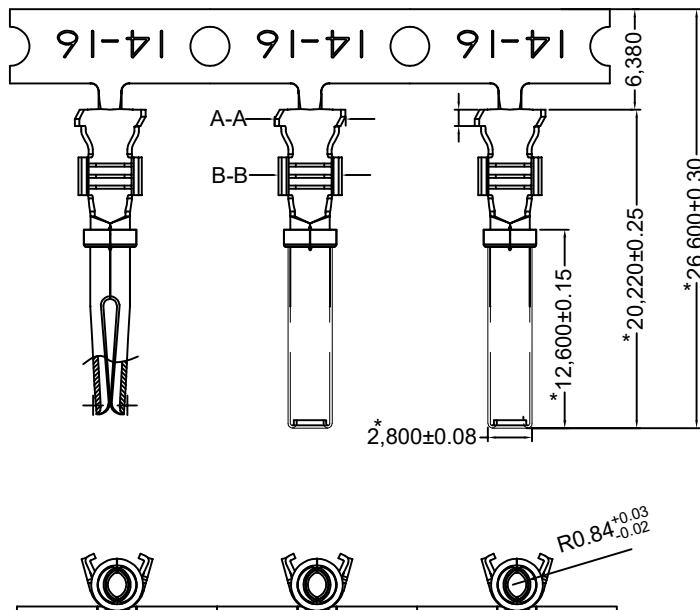

SECTION
A--A



SECTION
B--B

注 (NOTES):

- 零件表面光滑,无模痕.油污等缺陷.
Part to be smooth,clean and free of nicks,oils and debris.
- 去毛刺尖角,锐边倒钝.
Remove burrs-break sharp edges R0.1 max. filled radii 0.1 max.
- 未注表面粗糙度
All machined surface shall be $\sqrt{}$ or better.
- "*"所示为产品关键特征.
*"Denotes KPC(key product characteristic).
- Plating is Nickel 2.5~4.5 μ m.
- 产品要符合ROHS要求:
Part shall be accord with ROHS requirement.

1	XF1062-14-0122	4000	冲压后电镀	盘装
ITEM	PART NUMBER	Qty	DESCRIPTION	REMARK
MATERIALS LIST				
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.20 2 PL DEC ±0.10 3 PL DEC ±0.05 Fractions ±1/64 Angles ±1°				
签名 SIGNATURE		日期 DATE		
制图 DRAWN		YSP	2019.08.20	
审核 CHECKED		JAY	2019.08.20	
工艺 ENGINEER		HHJ	2019.08.20	
批准 APPROVAL		YSK	2019.08.21	
MATERIAL SPECIFICATIONS:			THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE XIANGFENG CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.	
CuSn6			Ningbo Xiangfeng Electric Co., LTD	
16# Pin Contact, 16-14AWG			XF1062-14-0122	
第三角视图	文件编号	图 号	图 名	版 次
XF-6015-E	FSOM NO.	SIZE	MASS	REV.
1	A4	G	A0	XX
SHEET 1 OF 1			NEXT 285°	