
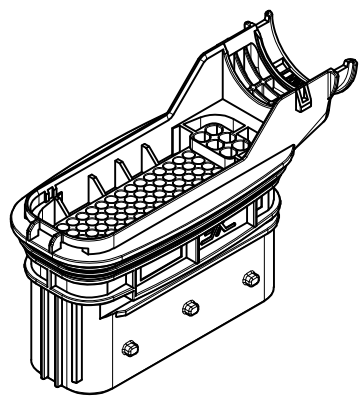
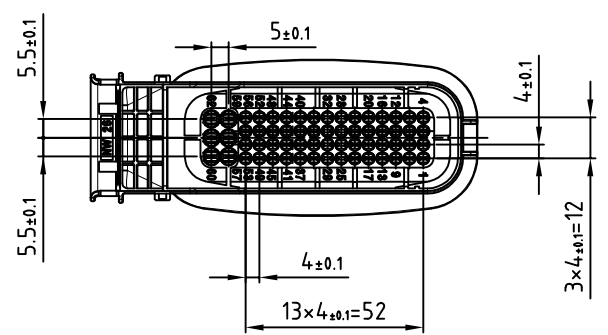
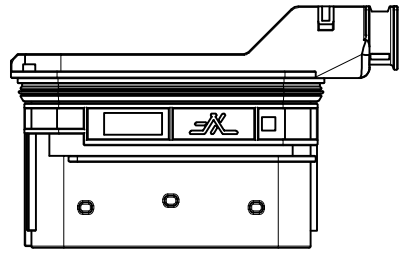

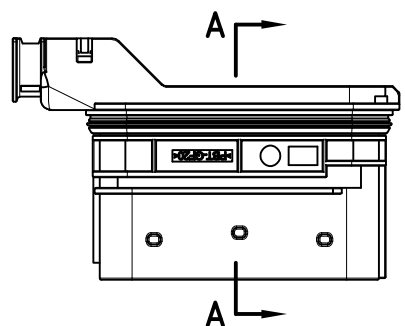



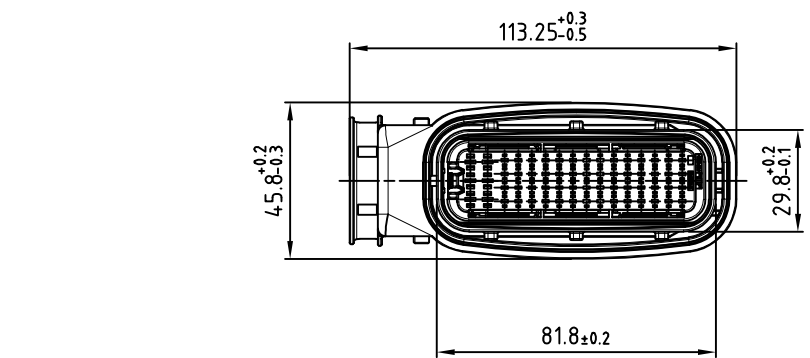

注:

- 1、电流等级:10A, 30A
- 2、工作温度:-40℃~120℃
- 3、防水:IP67, IP69K
- 4、UL 阻燃性等级: UL 94HB

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名称	连接件		
					型号	XF7621-1.5&2.8-11Blu		
设计	Zhang	2025.3	标准化		材料	PBT+GF		
					颜色	蓝色		
校对	Yang	2025.3			重量			
审核	Zhang	2025.3	比例	1:1	阶段标记	版次	01	
未注公差: XX.X ±0.2;					A	页数		