
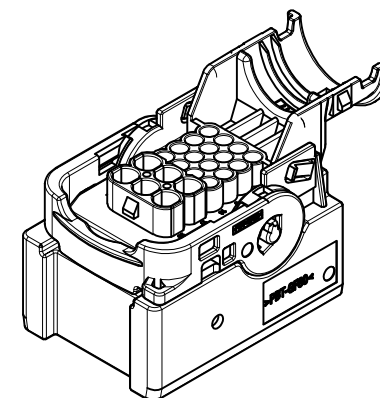
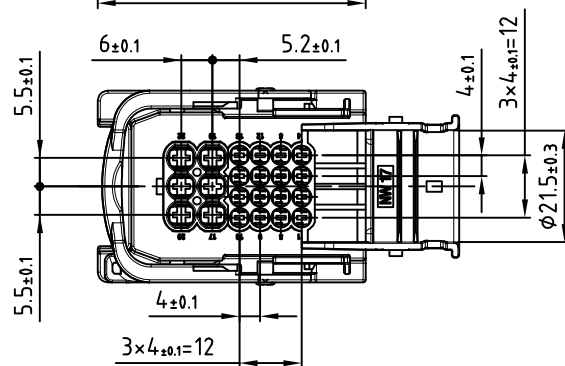
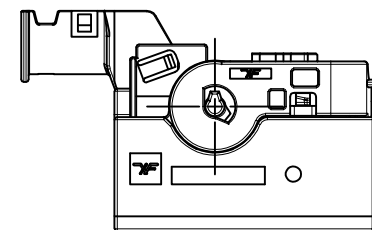

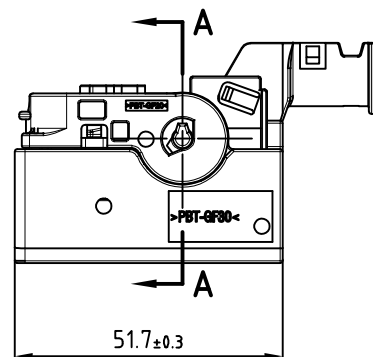



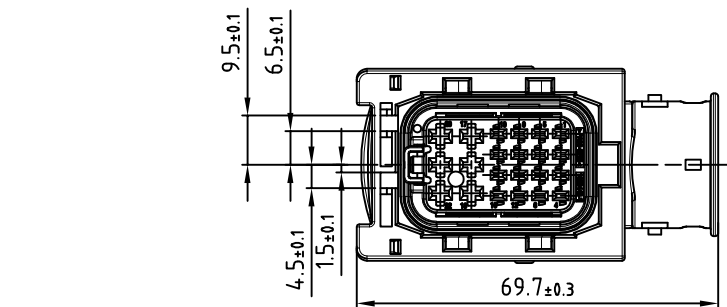

# NOTES:

1. CURRENT RATING: 20A, 30A.
2. OPERATING TEMPERATURE: -40℃ TO +120℃.
3. MOISTURE RESISTANCE: IP67, IP69K.

 宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

|           |       |         |          |     |                                                                                       |                       |  |
|-----------|-------|---------|----------|-----|---------------------------------------------------------------------------------------|-----------------------|--|
|           |       |         |          |     | Name                                                                                  | Connector             |  |
|           |       |         |          |     | DrawingNo                                                                             | XF7221-1. 5&2. 8-21Bk |  |
|           |       |         |          |     | Material                                                                              | PBT+GF                |  |
| Design    | Lai   | 2025. 4 | Revision | 01  | Color                                                                                 | Black                 |  |
| Proofread | Yang  | 2025. 4 |          |     | Weight Kg                                                                             |                       |  |
| Approval  | Zhang | 2025. 4 | Scale    | 1:1 |  | Pages                 |  |