

A

B

C

D

E

F

A

B


C

D






E

F

1 2 3 4 5 6 7 8



A-A

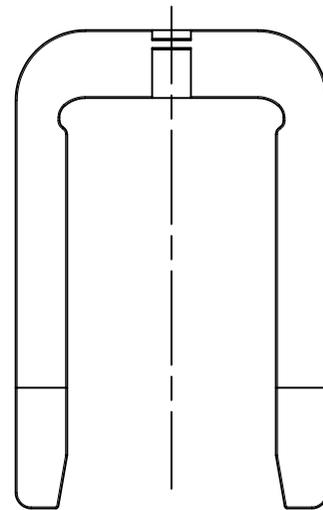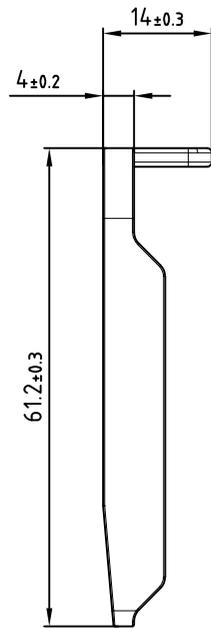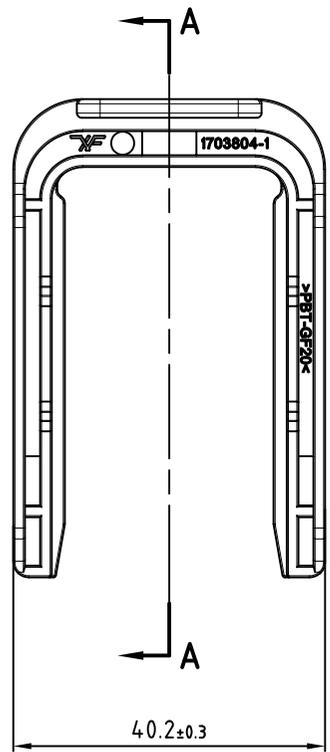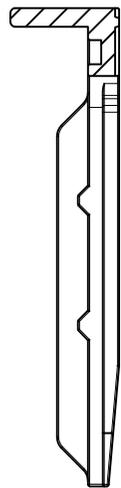

注:

1、工作温度:-40℃~140℃

宁波翔洋电气有限公司

NINGBO XF ELECTRONIC CO., LTD

|                  |       |        |          |      |             |    |  |
|------------------|-------|--------|----------|------|-------------|----|--|
|                  |       |        |          | 名称   | 连接件         |    |  |
|                  |       |        |          | 型号   | XF1703804-1 |    |  |
|                  |       |        |          | 材料   | PBT+GF      |    |  |
|                  |       |        |          | 颜色   | 红色          |    |  |
| 设计               | Lai   | 2025.4 | 标准化      | 重量   |             |    |  |
| 校对               | Yang  | 2025.4 |          | 阶段标记 | 版次          | 01 |  |
| 审核               | Zhang | 2025.4 | 比例 1.5:1 | 页数   |             |    |  |
| 未注公差: XX.X ±0.2; |       |        |          | A    |             |    |  |

1 2 3 4 5 6 7 8