


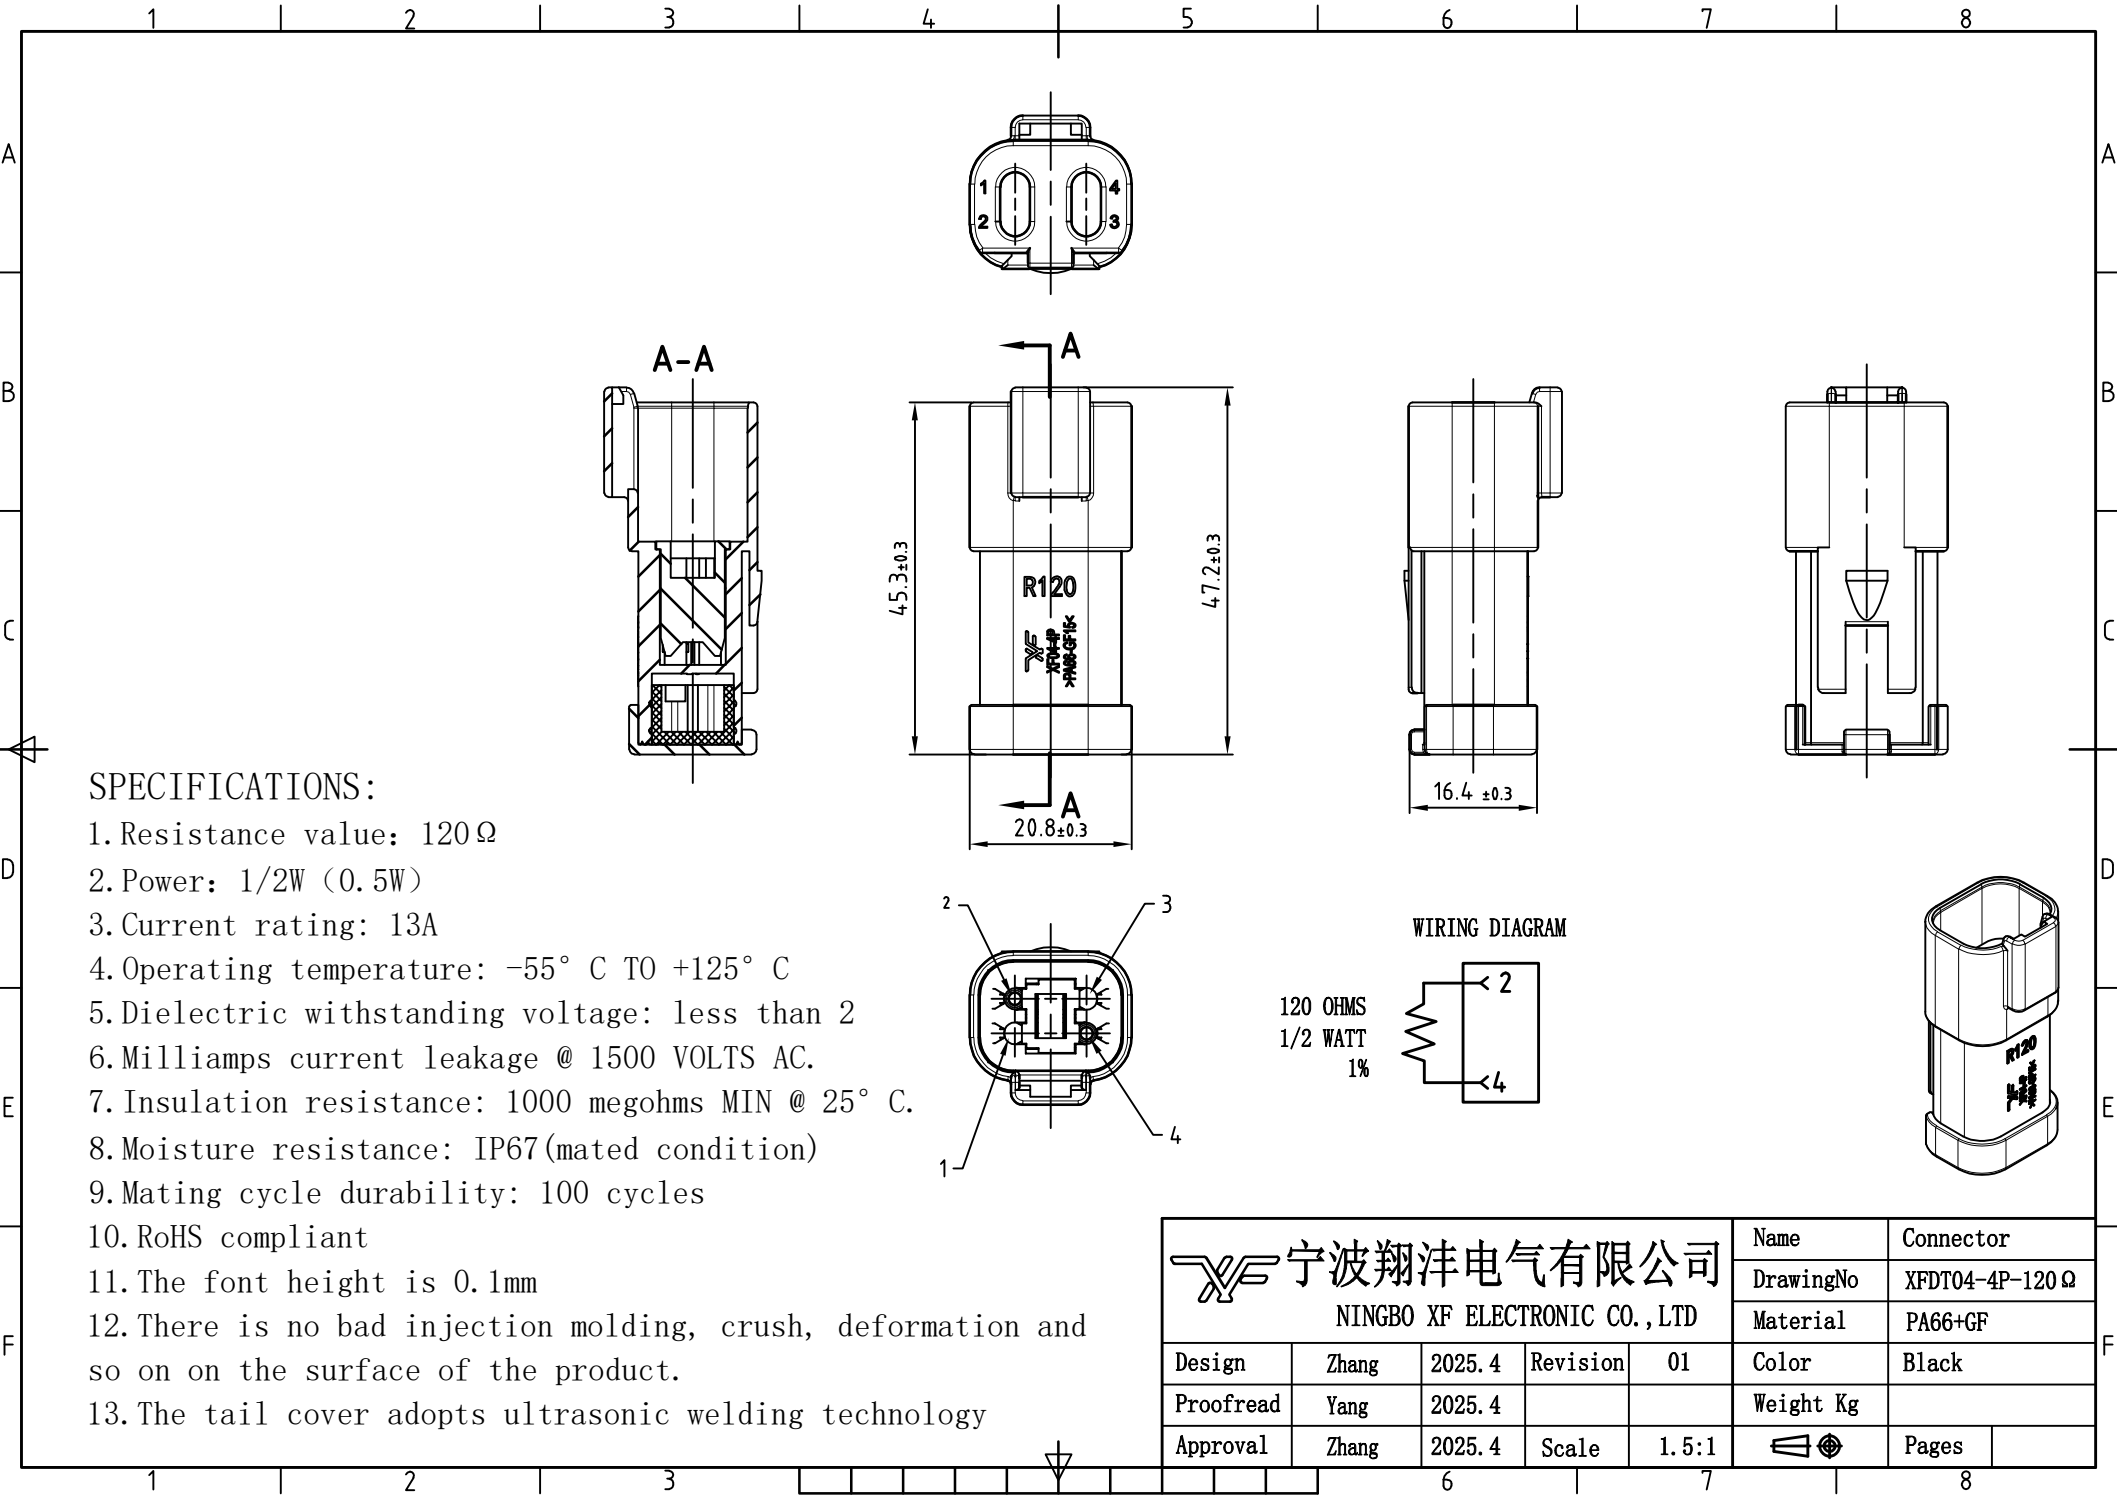

SPECIFICATIONS:

- 1. Resistance value: 120Ω
- 2. Power: 1/2W (0.5W)
- 3. Current rating: 13A
- 4. Operating temperature: -55° C TO +125° C
- 5. Dielectric withstanding voltage: less than 2
- 6. Milliamps current leakage @ 1500 VOLTS AC.
- 7. Insulation resistance: 1000 megohms MIN @ 25° C.
- 8. Moisture resistance: IP67(mated condition)
- 9. Mating cycle durability: 100 cycles
- 10. RoHS compliant
- 11. The font height is 0.1mm
- 12. There is no bad injection molding, crush, deformation and so on on the surface of the product.
- 13. The tail cover adopts ultrasonic welding technology

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XFDT04-4P-120 Ω	
					Material	PA66+GF	
Design	Zhang	2025. 4	Revision	01	Color	Black	
Proofread	Yang	2025. 4			Weight Kg		
Approval	Zhang	2025. 4	Scale	1. 5 : 1		Pages	