


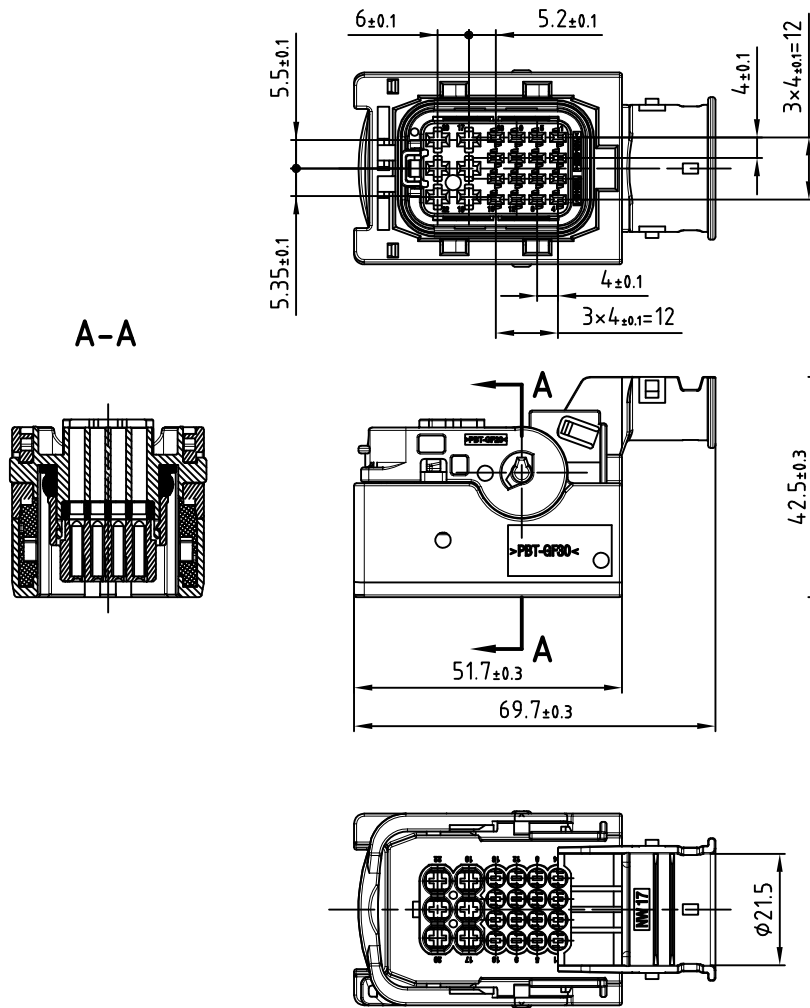

NOTES:

1. CURRENT RATING: 20A, 32A.
2. OPERATING TEMPERATURE: -40℃ TO +120℃.
3. MOISTURE RESISTANCE: IP67, IP69K.

宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO., LTD

Design	Lai	2025. 4	Revision	01	Name	Connector	
Proofread	Yang	2025. 4			DrawingNo	XF7221-1. 5&2. 8-21Gr	
Approval	Zhang	2025. 4	Scale	1:1	Material	PBT+GF30	
					Color	Grey	
					Weight Kg		
					Pages		

