

1 2 3 4 5 6 7 8

A


B

C



D

E

F

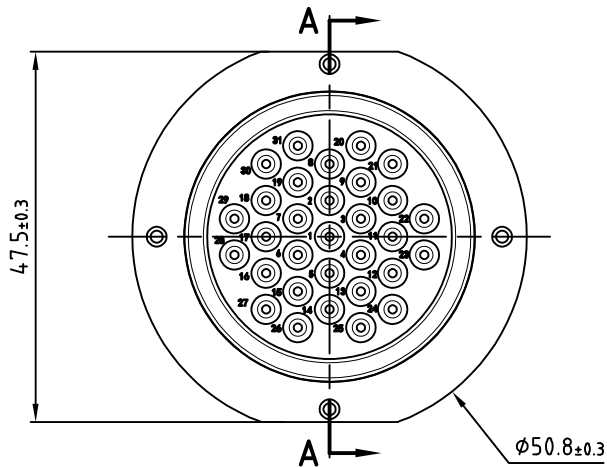

A-A

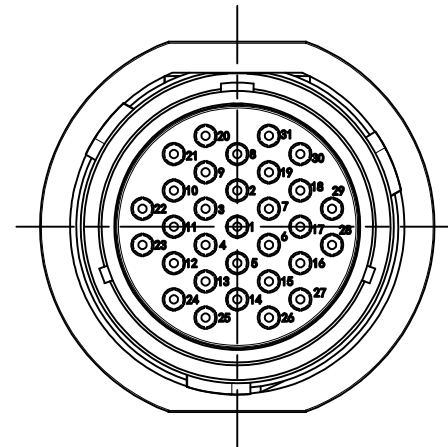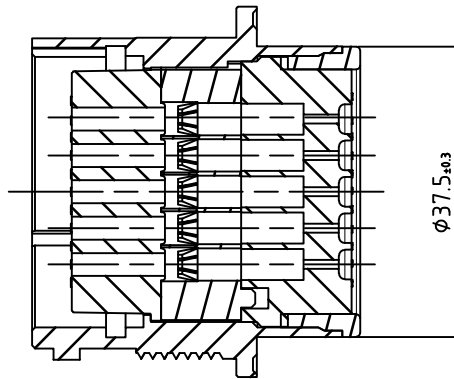

A



B

C

D

E

F

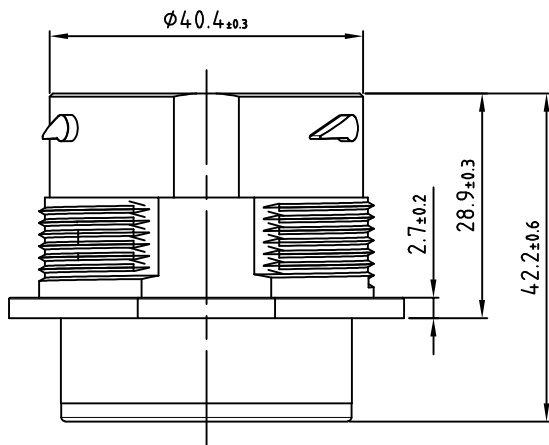

备注:

- 1、工作温度: $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$
- 2、UL 阻燃性等级: UL 94V-0
- 3、防水: IP67
- 4、适配: XF2414-001-2486金属波纹卡簧、XF2411-001-2405螺母

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名称	连接件		
					型号	HXP24-24-31ST		
					材料	PA66+GF		
设计	Lai	2025.5	标准化		颜色	黑色		
校对	Yang	2025.5			重量			
审核	Zhang	2025.5	比例	1.5:1	阶段标记	版次	01	
未注公差: XX.X ± 0.2 ;					A	页数		

1 2 3 4 5 6 7 8