

1 2 3 4 5 6 7 8

A


B

C



D

E

F

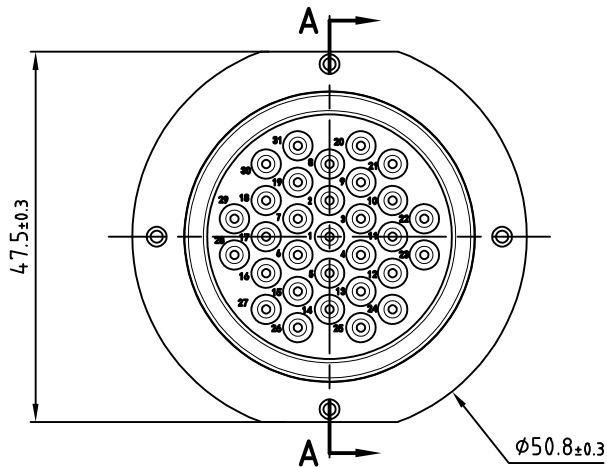

A-A

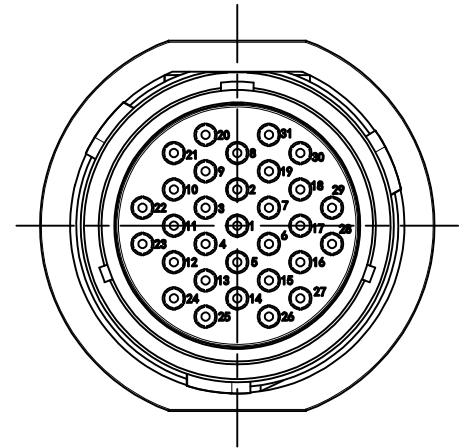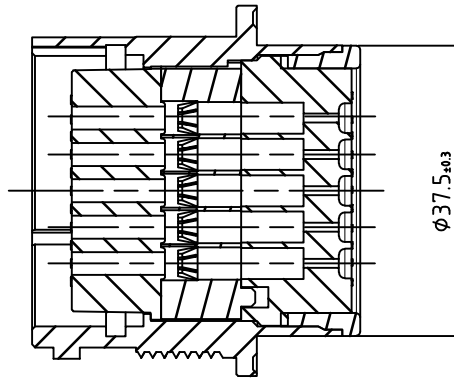

A



B

C

D

E

F

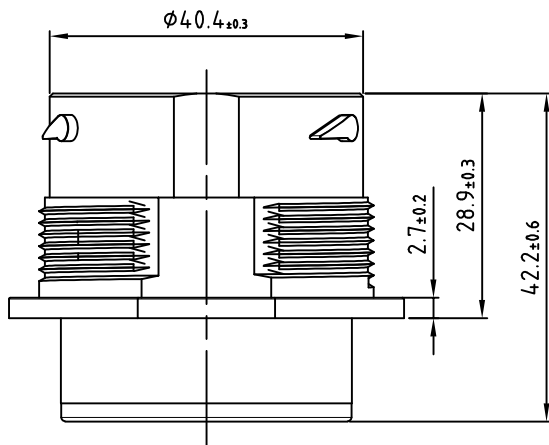

备注:

- 1、工作温度:-55℃~125℃
- 2、UL 阻燃性等级: UL 94V-0
- 3、防水:IP67
- 4、适配: XF2414-001-2486金属波纹卡簧、XF2411-001-2405螺母

 宁波翔洋电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名 称	连接件			
					型 号	HXP24-24-31SE			
					材 料	PA66+GF			
设 计	Lai	2025.5	标准化		颜 色	黑色			
校 对	Yang	2025.5			重 量				
审 核	Zhang	2025.5	比 例	1.5:1	阶段标记		版 次	01	
未注公差: XX.X ±0.2;					A			页 数	

1 2 3 4 5 6 7 8