

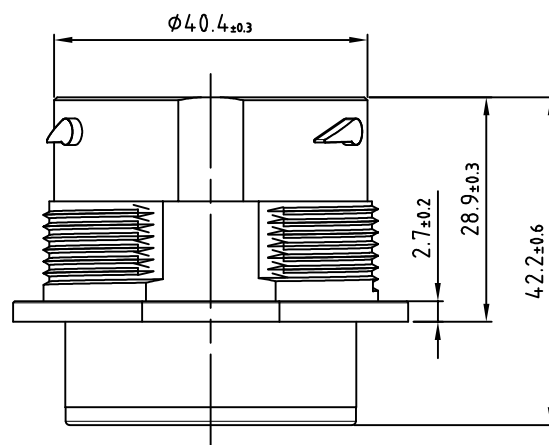
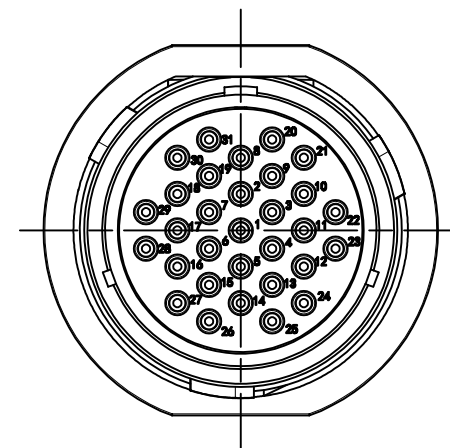
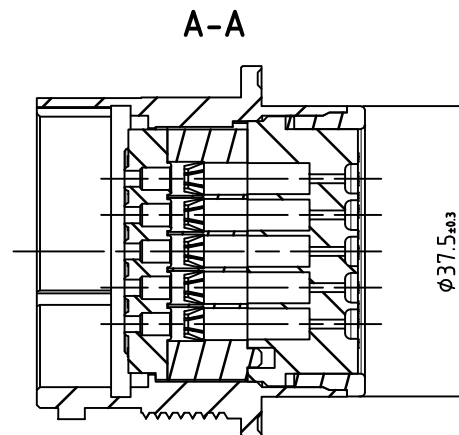


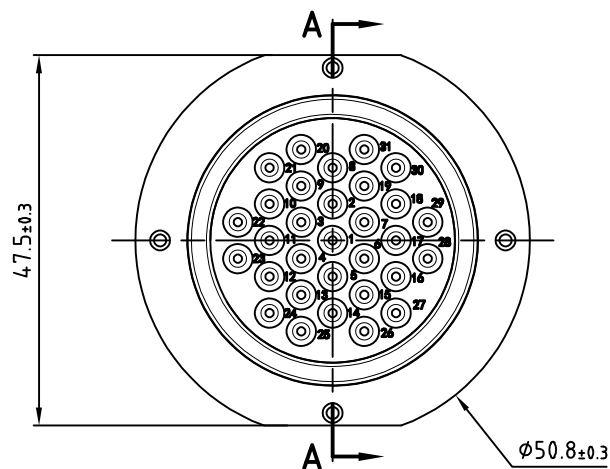

备注:

- 1、工作温度: $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$
- 2、UL 阻燃性等级: UL 94V-0
- 3、防水: IP67
- 4、适配: XF2414-001-2486金属波纹卡簧、
XF2411-001-2405螺母

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名 称	连接件			
					型 号	HXP24-24-31PT			
					材 料	PA66+GF			
设 计	Lai	2025.5	标准化		颜 色	黑色			
校 对	Yang	2025.5			重 量				
审 核	Zhang	2025.5	比 例	1.5:1	阶段标记		版 次	01	
未注公差: XX.X ±0.2;					A			页 数	