

A

B

C

D

E

F

A


B

C







D

E

F



A-A

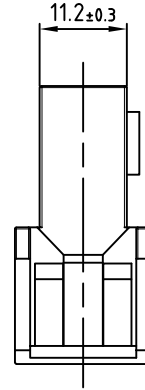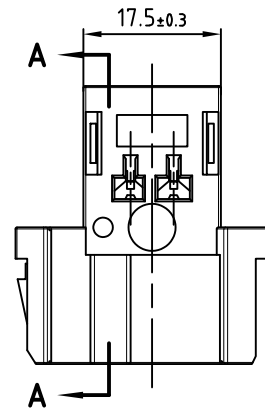

## NOTES:

1. OPERATING TEMPERATURE:  $-40^{\circ}\text{C}$  TO  $+120^{\circ}\text{C}$ .

2. OEM: 1-965641-4

 宁波翔沣电气有限公司  
NINGBO XF ELECTRONIC CO., LTD

|           |       |        |          |       |
|-----------|-------|--------|----------|-------|
| Design    | Lai   | 2025.5 | Revision | 01    |
| Proofread | Yang  | 2025.5 |          |       |
| Approval  | Zhang | 2025.5 | Scale    | 1.5:1 |

|                                                                                       |                  |  |
|---------------------------------------------------------------------------------------|------------------|--|
| Name                                                                                  | Connector        |  |
| DrawingNo                                                                             | XF7061-2.8-11Pur |  |
| Material                                                                              | PA66+GF13        |  |
| Color                                                                                 | Purple           |  |
| Weight Kg                                                                             |                  |  |
|  | Pages            |  |

1

2

3

6

7

8