

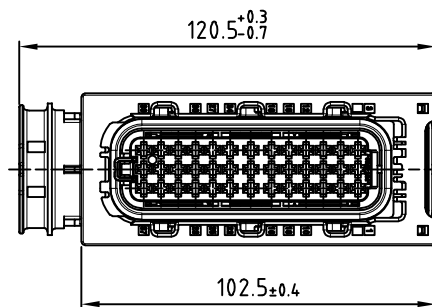
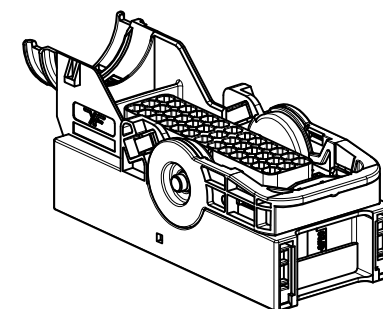
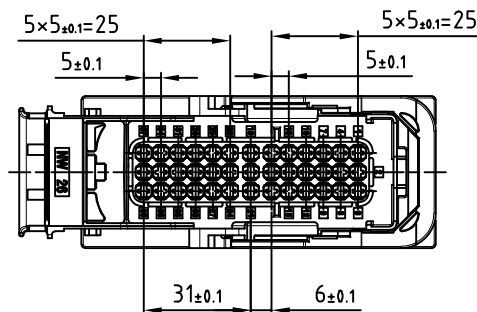
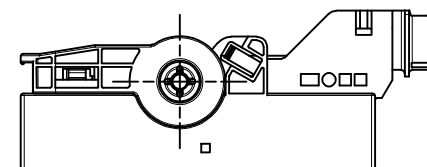



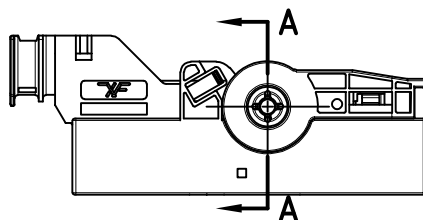

A-A



NOTES:

1. CURRENT RATING: 32A MAXIMUM.
2. OPERATING TEMPERATURE: -40°C TO +120°C.
3. MOISTURE RESISTANCE: IP67, IP69K.

宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

Design	Zhang	2025.3	Revision	01
Proofread	Yang	2025.3		
Approval	Zhang	2025.3	Scale	1:1.5

Name	Connector	
DrawingNo	XF7391-1.5&2.8-21Br	
Material	PBT+GF	
Color	Brown	
Weight Kg		
Pages		