

A

B

C

D

E

F

A


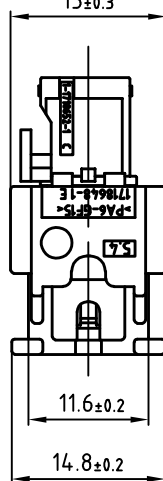
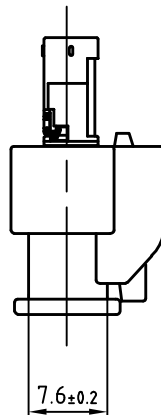

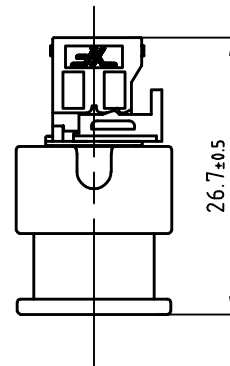

B

C

D

E

F

 15 ± 0.3  1.5 ± 0.2 11.6 ± 0.2 14.8 ± 0.2 4 ± 0.1  7.6 ± 0.2  26.7 ± 0.5 

注:

- 1、电流等级:最大电流为25A
- 2、工作温度: $-40^{\circ}\text{C} \sim 130^{\circ}\text{C}$
- 3、防水:IP6K9K

宁波翔洋电气有限公司

NINGBO XF ELECTRONIC CO., LTD

设 计	Yang	2025.5	标准化		颜 色		黑色	
校 对	Yang	2025.5			重 量			
审 核	Zhang	2025.5	比 例	2:1	阶段标记		版 次	01
未注公差: XX.X ±0.2;					A		页 数	



8