
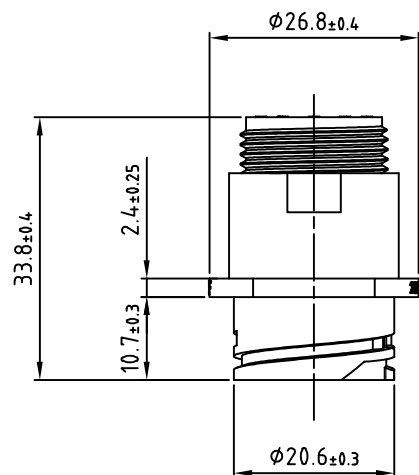
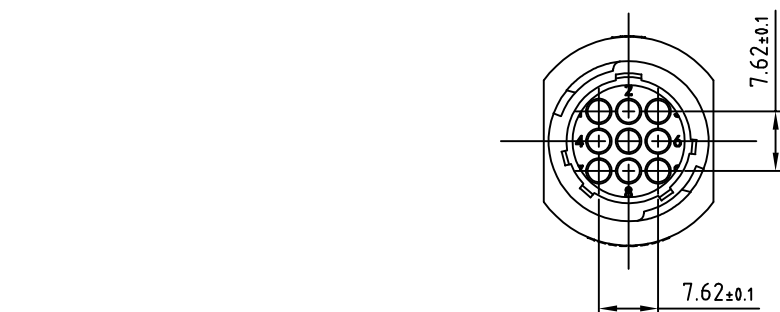




PERIPHERAL SEAL
NITRILE BUTADIENE RUBBER, BLACK



NOTES:

- 1.Current rating: 13A MAX.
- 2.Operating Temperature range: -55°C TO $+105^{\circ}\text{C}$.
- 3.Flammability Rating:UL 94V-0.
- 4.OEM:206705-4

 宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025.6	Revision	01	Name	Connector
Proofread	Yang	2025.6			DrawingNo	XF7095-1.6-11Bk
Approval	Zhang	2025.6	Scale	1.5:1	Material	PA66+GF15
					Color	Black
					Weight Kg	
					Pages	