


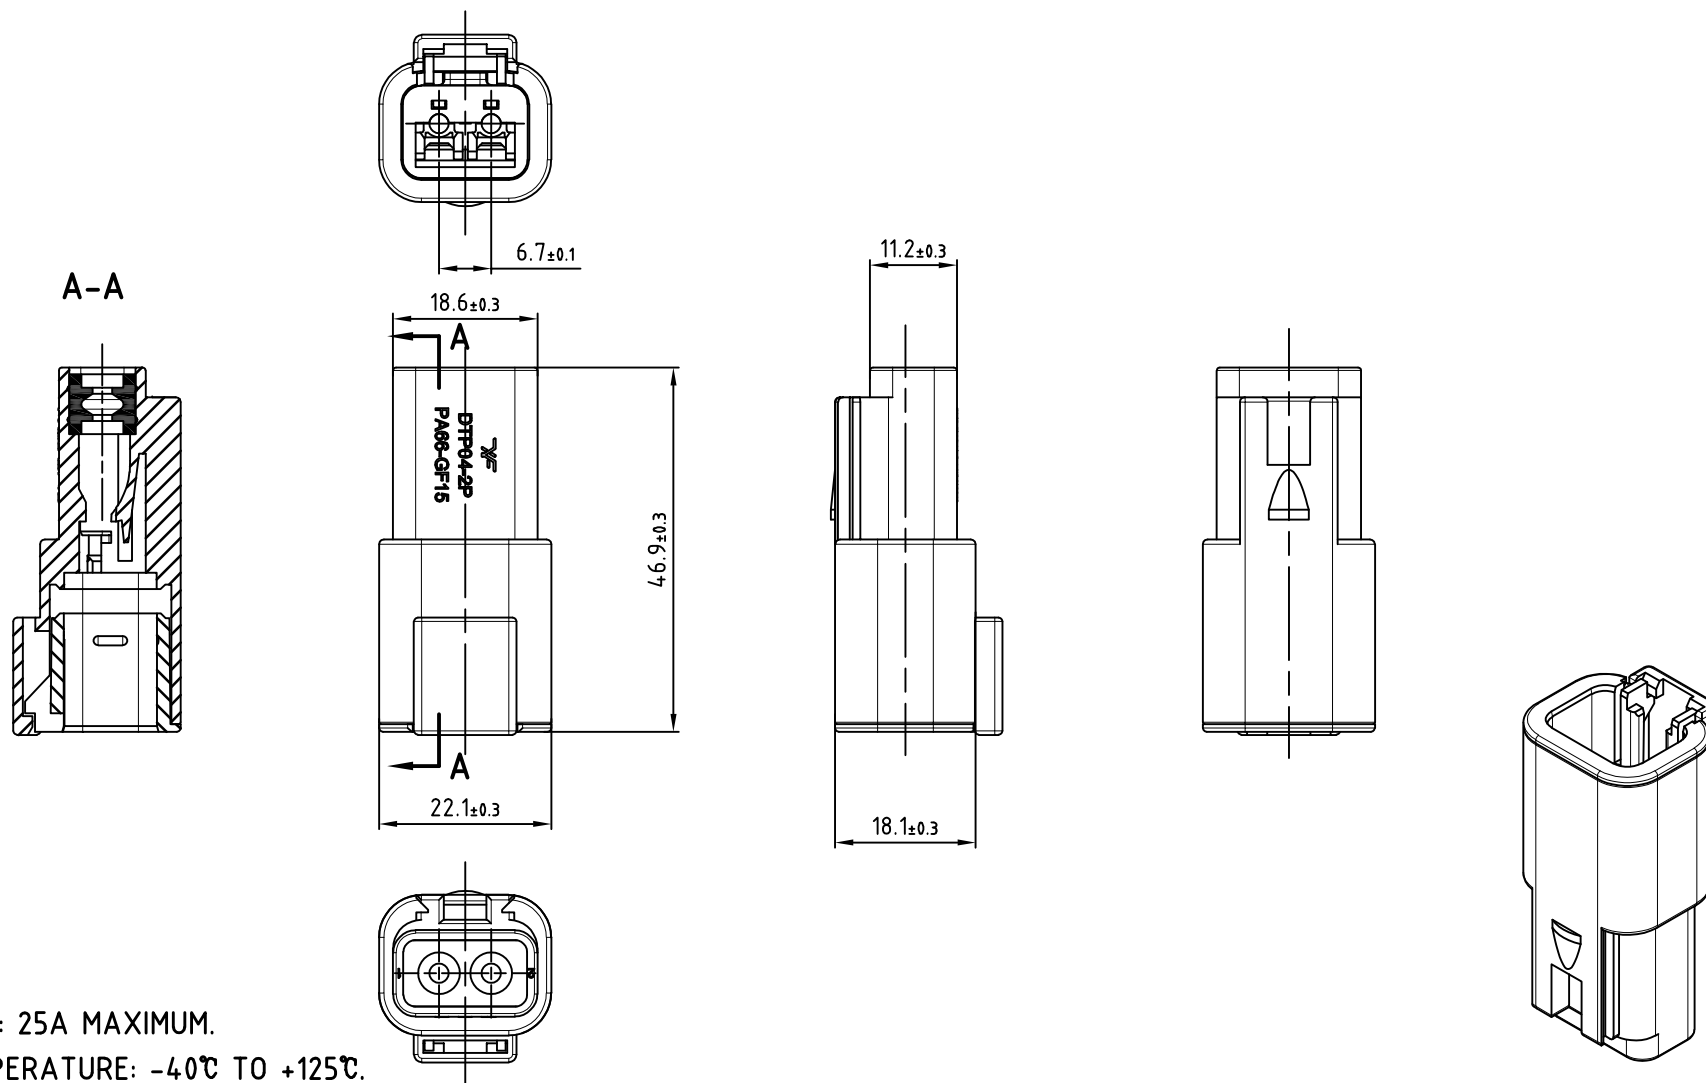

NOTES:

- 1.CURRENT RATING: 25A MAXIMUM.
- 2.OPERATING TEMPERATURE: -40℃ TO +125℃.
- 3.MOISTURE RESISTANCE:IP68,IP6K9K.
- 4.UL Flame Resistance Rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):200
Working voltage (VAC):200
Rated voltage configuration V):12 | 24

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector		
					DrawingNo	XTP04-2P		
					Material	PA66+GF15		
Design	Lai	2025. 7	Revision	01	Color	Grey		
Proofread	Yang	2025. 7			Weight Kg			
Approval	Zhang	2025. 7	Scale	1. 5:1		Pages		
			6	7			8	