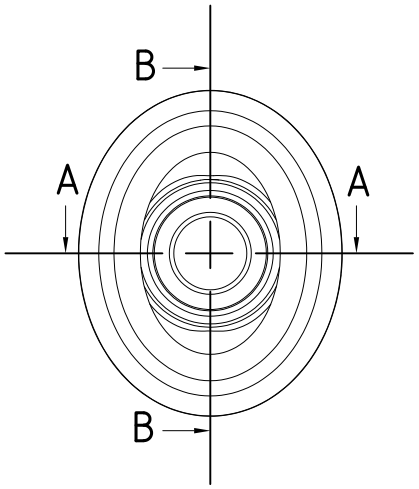

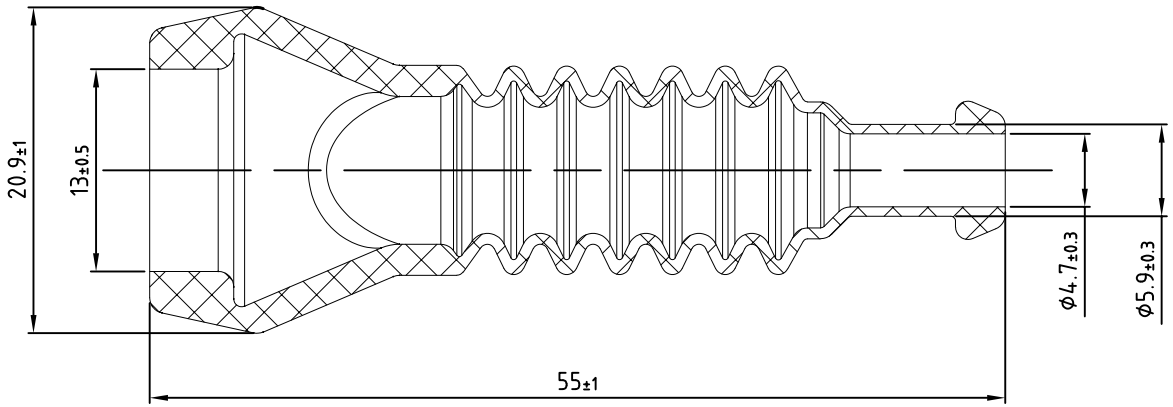

B - B

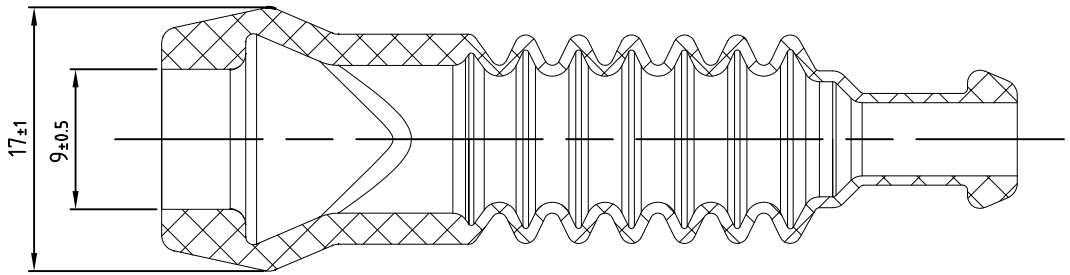

A - A

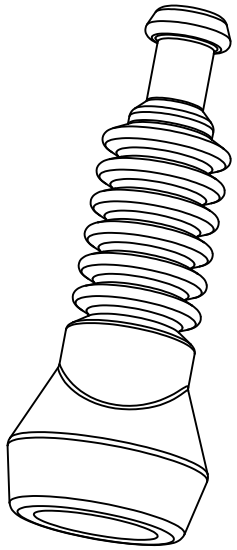

NOTES:

1.OPERATING TEMPERATURE: -40℃ TO +125℃.

2.UL Flame Resistance Rating:UL-94 V0

3.Shore Hardness:HS40°±5°

4.There is no bad injection molding, crush, deformation and so on on the surface of the product.

5.Undimensioned size tolerances in accordance with GB/T3672.1-2002 M3 F grade

6.2.RoHS COMPLIANT

宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Sheath
					DrawingNo	XQ-310
					Material	EPDM
Design	Lai	2025.7	Revision	01	Color	Black
Proofread	Yang	2025.7			Weight Kg	
Approval	Zhang	2025.7	Scale	3:1		Pages