

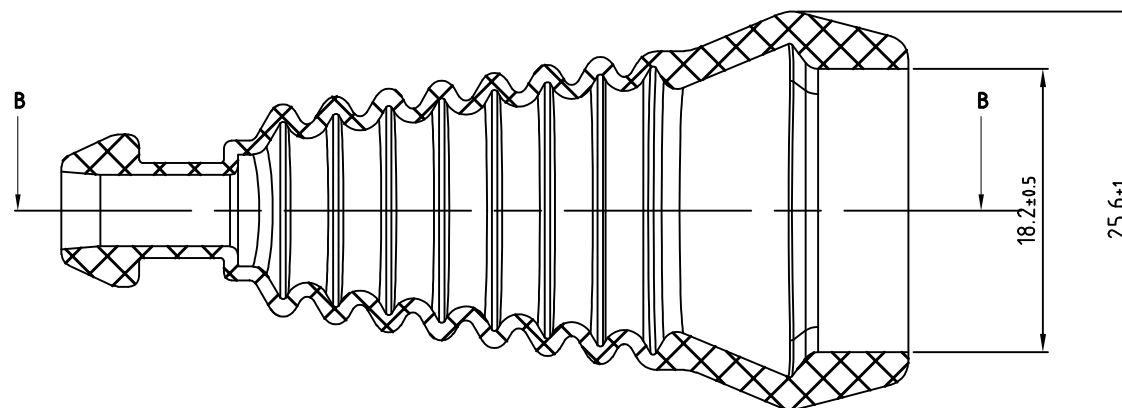
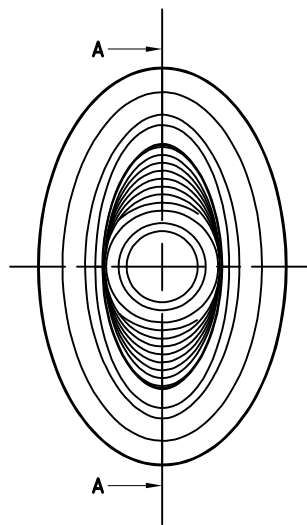




A - A

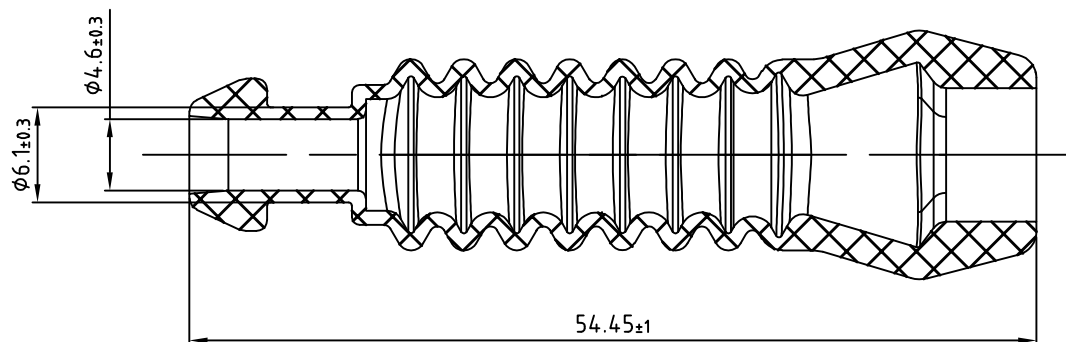

NOTES:

- 1.OPERATING TEMPERATURE: -40°C TO $+125^{\circ}\text{C}$.
- 2.UL Flame Resistance Rating:UL-94 V0
- 3.Shore Hardness:HS40° $\pm 5^{\circ}$
- 4.There is no bad injection molding, crush, deformation and so on on the surface of the product.
- 5.Undimensioned size tolerances in accordance with GB/T3672.1-2002 M3 F grade
- 6.2.RoHS COMPLIANT

 宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name		Sheath	
					DrawingNo		XQ-886	
					Material		EPDM	
Design	Lai	2025.7	Revision	01	Color		Black	
Proofread	Yang	2025.7			Weight Kg			
Approval	Zhang	2025.7	Scale	3:1			Pages	