

A

B

C

D

E

F

A








B

C

D

E

F

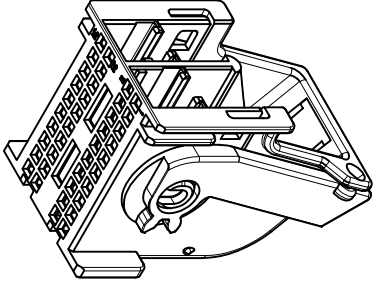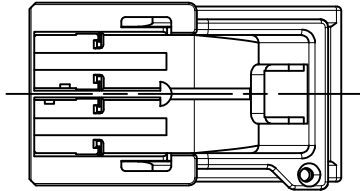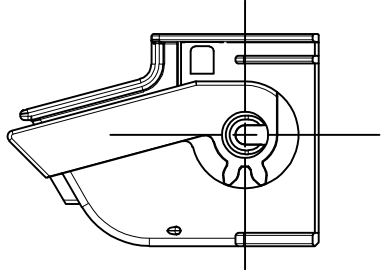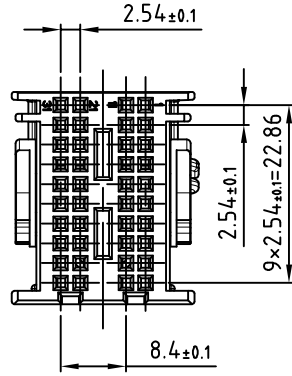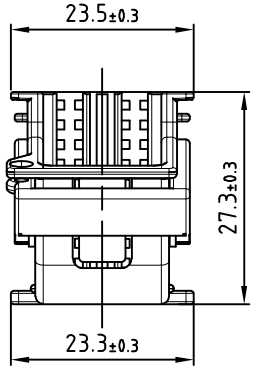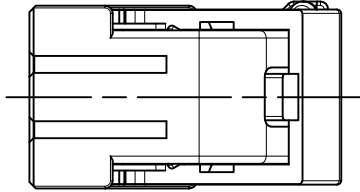

NOTES:

- 1.OPERATING TEMPERATURE: -40℃ TO +120℃.
- 2.UL Flame Resistance Rating:UL94HB.

宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

Design	Yang	2025.7	Revision	01
Proofread	Yang	2025.7		
Approval	Zhang	2025.7	Scale	1.5:1

Name	Connector
DrawingNo	XF7401-0.6-21BK
Material	PBT+GF
Color	Black
Weight Kg	
Pages	