

A

B

C

D

E

F

A







B

C

D

E

F

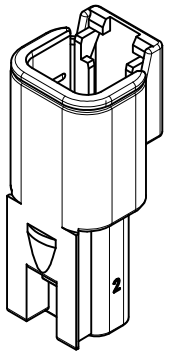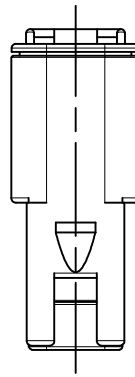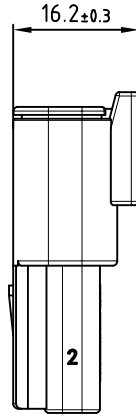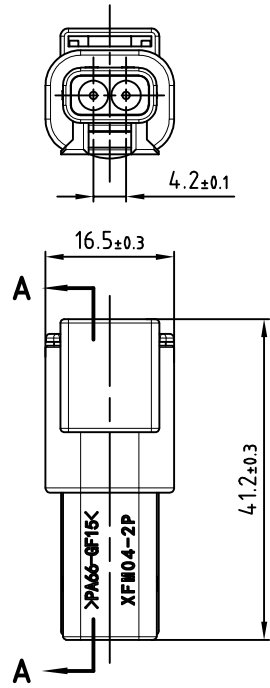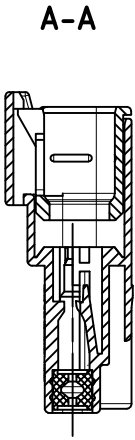

注:

1、端子额定电流(最大值) (A):7.5A

2、工作温度:-40℃~125℃

3、防水:IP68、IP6K9K

4、UL阻燃性等级:UL-94 V0

5、电气特征:工作电压 (VDC):250

工作电压 (VAC):250

标称电压架构 (V):12|24|48

 宁波翔洋电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名称	连接件		
					型号	XTM04-2P-E004		
					材料	PA66+GF		
设计	Lai	2025.8	标准化		颜色	黑色		
校对	Yang	2025.8			重量			
审核	Zhang	2025.8	比例	1.5:1	阶段标记	版次	01	
未注公差: XX.X ±0.2;					A	页数		