

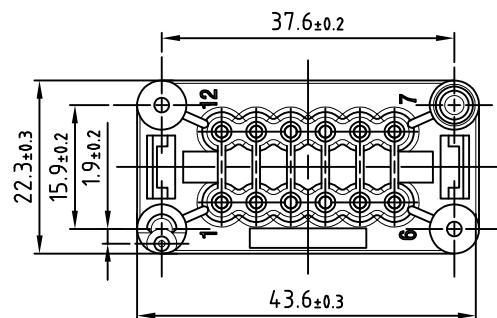
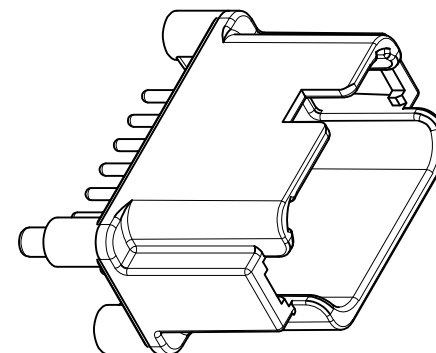
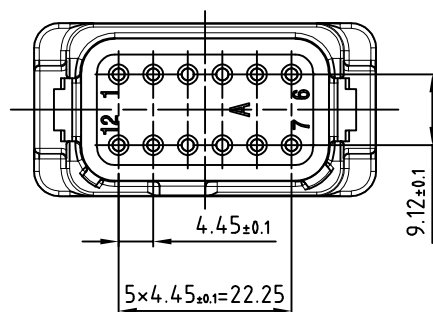
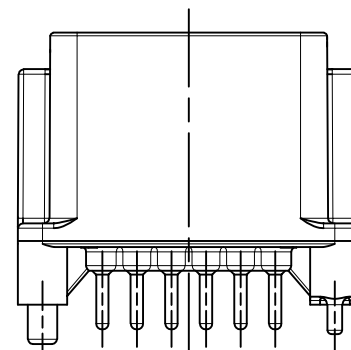
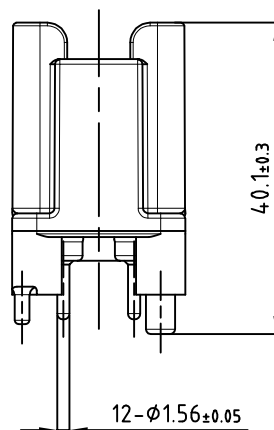


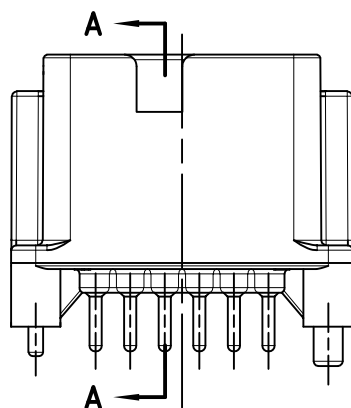

A-A

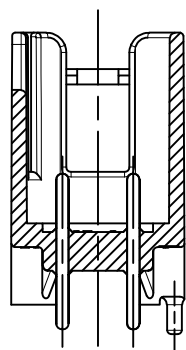

NOTES:

1. Rated current (maximum): 13A.
2. Working temperature range: -40°C TO $+125^{\circ}\text{C}$.
3. UL Flame resistance rating: UL-94 V0
4. Electrical characteristics:
Working voltage (VDC): 250
Working voltage (VAC): 250
Rated voltage configuration (V): 12 | 24

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

Design	Lai	2025.8	Revision	01	Name	Connector	
					DrawingNo	XTF15-12PA	
Proofread	Yang	2025.8			Material	PA66+GF15	
					Color	Grey	
Approval	Zhang	2025.8	Scale	1.5:1	Weight Kg		
						Pages	