

A

B

C

D

E

F

A








B

C

D

E

F

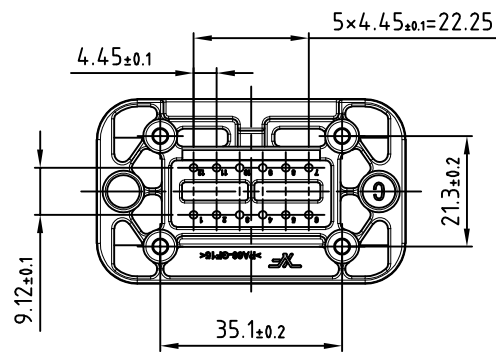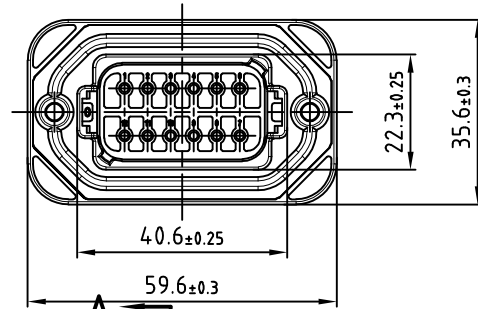

注:

- 端子额定电流(最大值)(A):13A
- 工作温度:-40℃~125℃
- UL阻燃性等级:UL-94 V0
- 电气特征:工作电压(VDC):250
工作电压(VAC):250
标称电压架构(V):12|24

宁波翔洋电气有限公司

NINGBO XF ELECTRONIC CO., LTD

设 计	Zhang	2025.8	标准化		颜 色	绿 色		
校 对	Yang	2025.8			重 量			
审 核	Zhang	2025.8	比 例	1:1	阶段标记		版 次	01
未注公差: XX.X ±0.2;					A		页 数	