
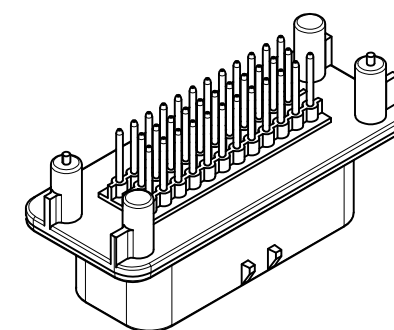
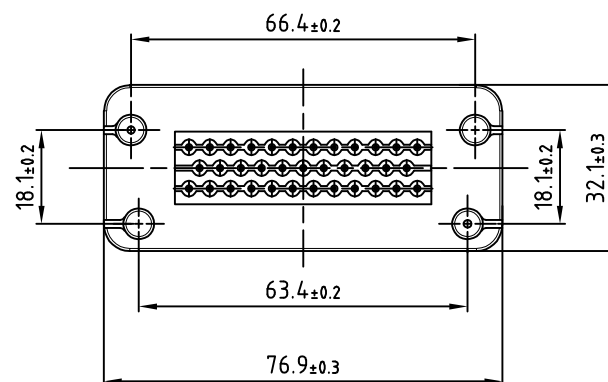
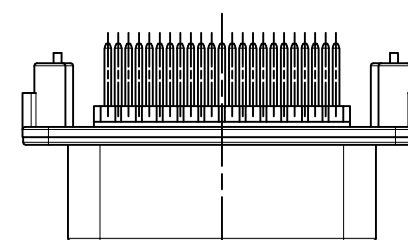

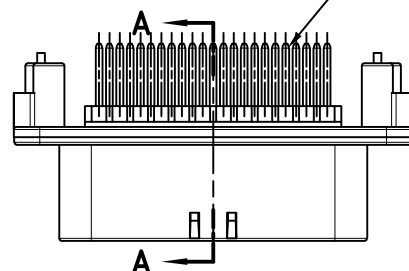



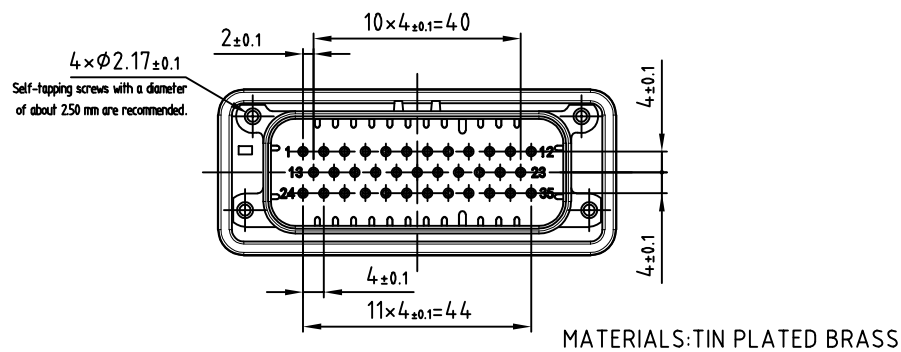

NOTES:

- 1.Rated current (maximum): 8A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.UL Flame resistance rating:UL-94 V0
- 4.OEM:776231-4

宁波翔洋电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025.8	Revision	01	Name	Connector
					DrawingNo	XF7352-1.3-11Gr
					Material	PBT+GF
Proofread	Yang	2025.8			Color	Grey
Approval	Zhang	2025.8	Scale	1:1	Weight Kg	
					Pages	