


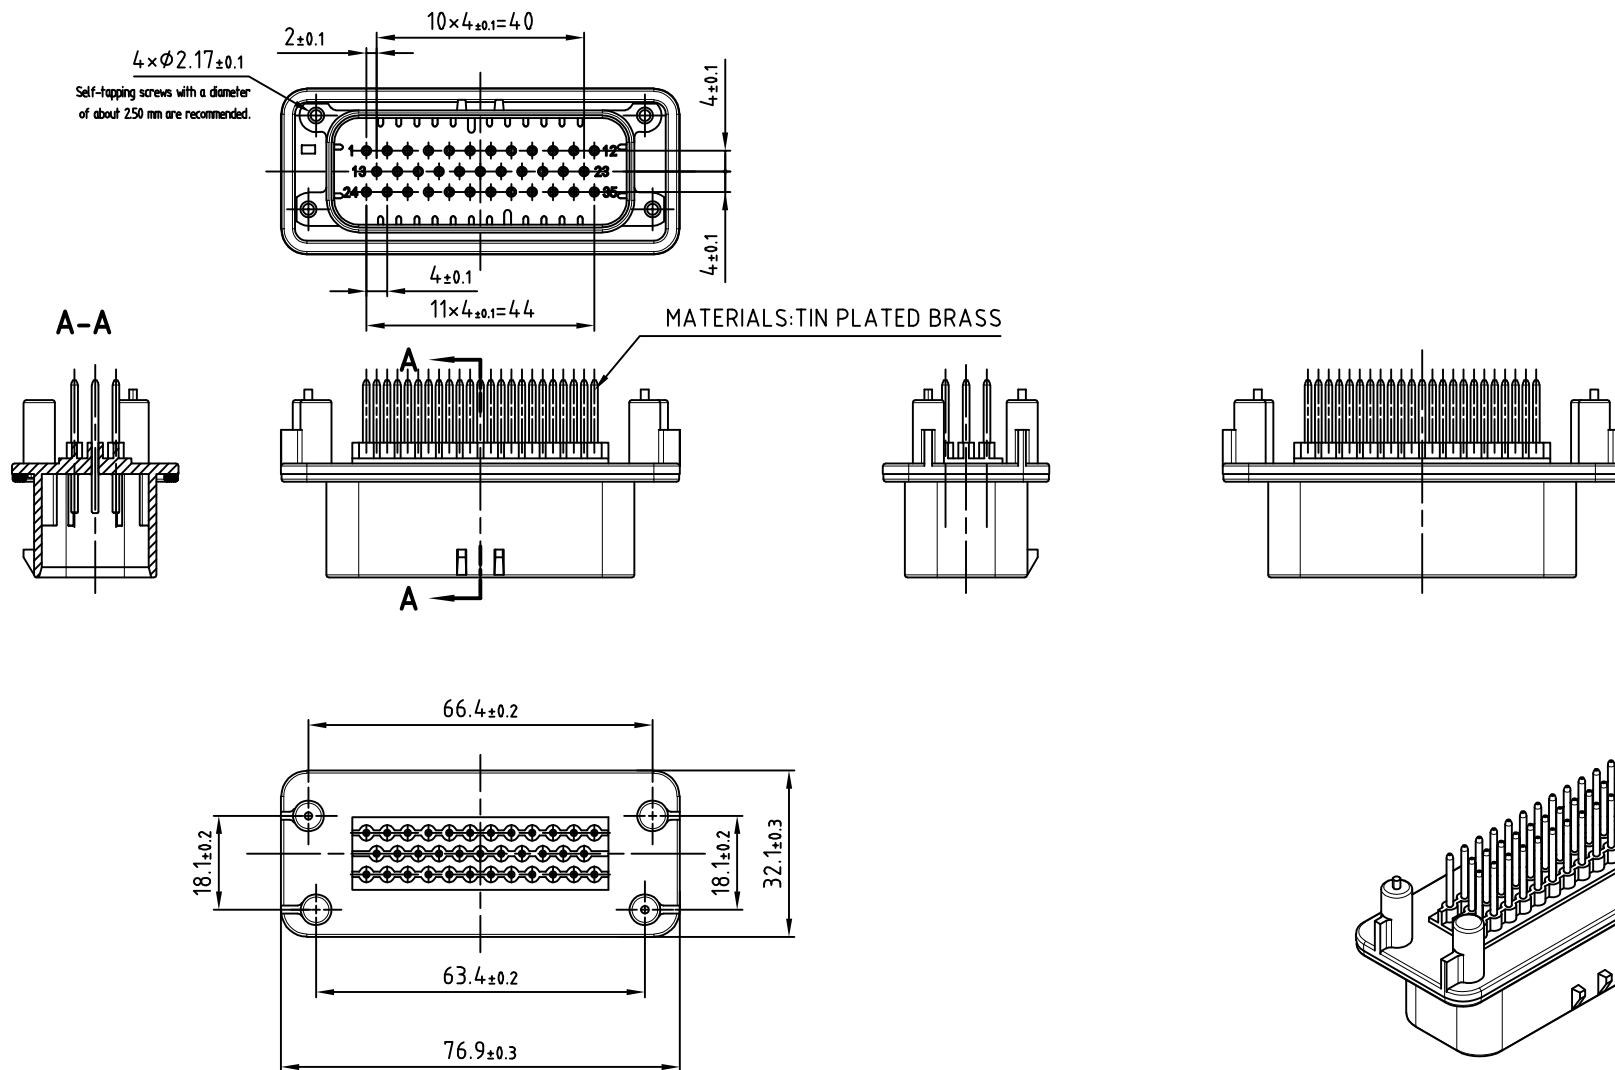

NOTES:

- 1.Rated current (maximum): 8A.
- 2.Working temperature range: -40°C TO $+125^{\circ}\text{C}$.
- 3.UL Flame resistance rating:UL-94 V0
- 4.OEM:776231-1

宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

					Name	Connector	
					DrawingNo	XF7352-1.3-11Bk	
					Material	PBT+GF	
Design	Lai	2025.8	Revision	01	Color	Black	
Proofread	Yang	2025.8			Weight Kg		
Approval	Zhang	2025.8	Scale	1:1		Pages	