
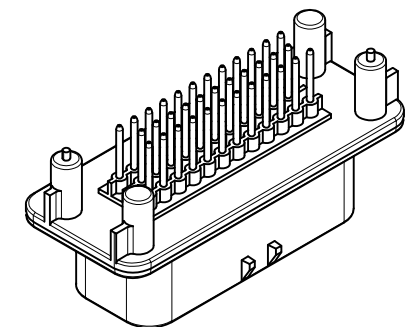
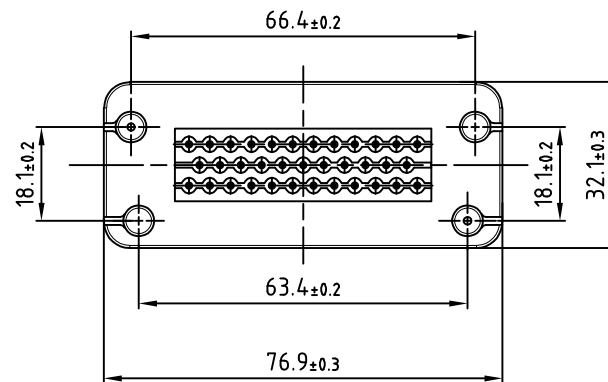
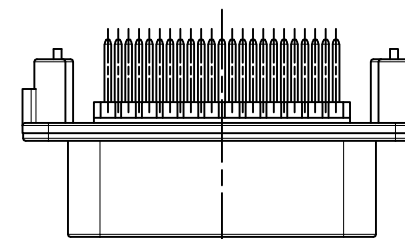

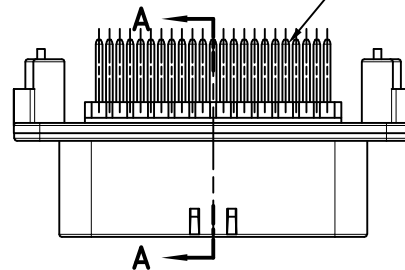



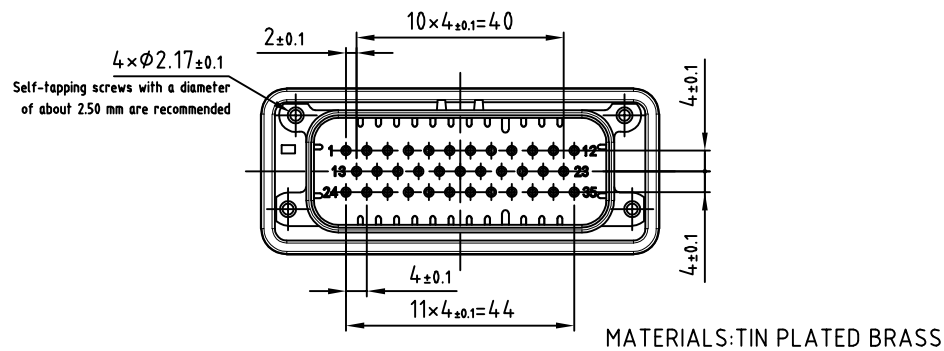

NOTES:

- 1.Rated current (maximum): 8A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.UL Flame resistance rating:UL-94 V0
- 4.OEM:776230-4

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name		Connector	
					DrawingNo		XF7352a-1.3-11Gr	
					Material		PBT+GF	
Design	Lai	2025.8	Revision	01	Color		Grey	
Proofread	Yang	2025.8			Weight Kg			
Approval	Zhang	2025.8	Scale	1:1			Pages	