

A

B

C

D

E

F

A



B

C

D

E

F

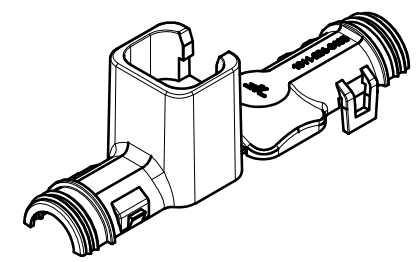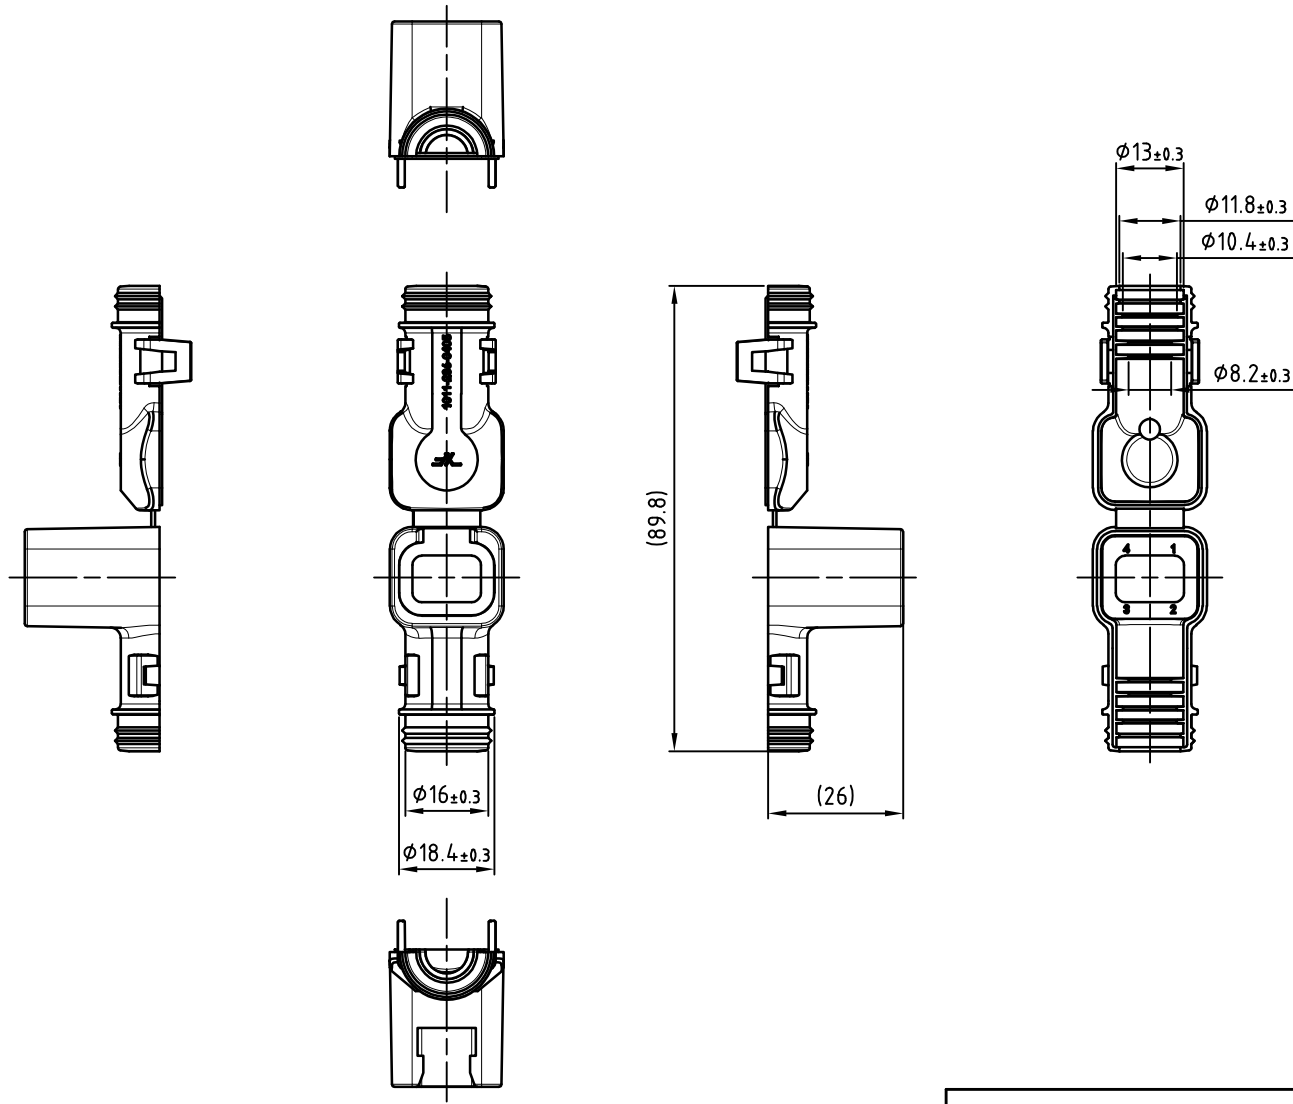

NOTES:

- 1.Working temperature range: -40℃ TO +150℃.
- 2.Moisture resistance:IP6K9K.
- 3.UL Flame resistance rating:UL-94HB

 宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025.9	Revision	01	Color	Black	
Proofread	Yang	2025.9			Weight Kg		
Approval	Zhang	2025.9	Scale	1:1		Pages	