
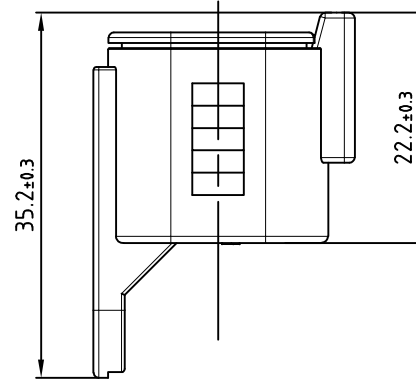
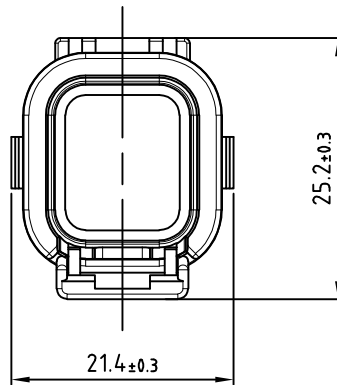
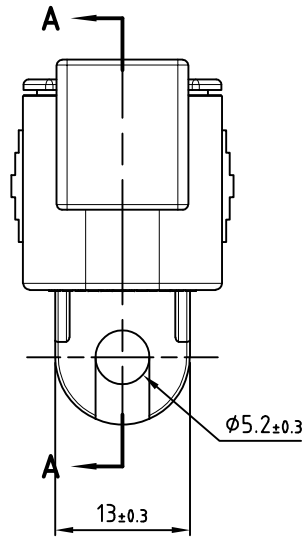



NOTES:

- 1.Working temperature range: -40℃ TO +125℃.
- 2.UL Flame resistance rating:UL-94 V0

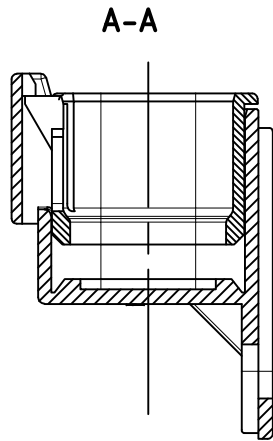

宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XTM06-6s-cover	
					Material	PA66+GF15	
Design	Lai	2025.9	Revision	01	Color	Black	
Proofread	Yang	2025.9			Weight Kg		
Approval	Zhang	2025.9	Scale	2:1		Pages	