

A

B

C

D

E

F

A







B

C

D

E

F

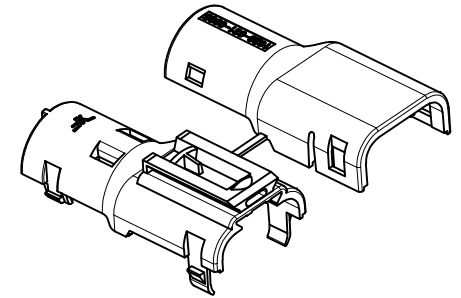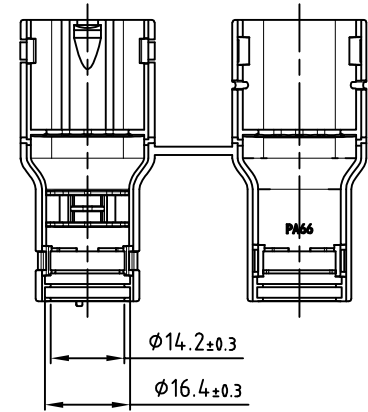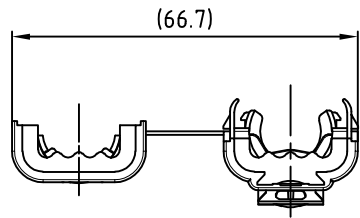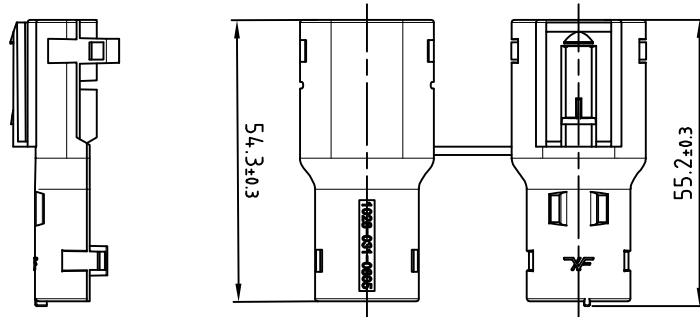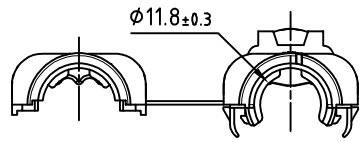

NOTES:

1. Working temperature range: -40°C TO $+125^{\circ}\text{C}$.
2. UL Flame resistance rating: UL-94 HB

 宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO., LTD

Design	Lai	2025. 9	Revision	01	Name	Backshell
Proofread	Yang	2025. 9			DrawingNo	XF1028-031-0805
Approval	Zhang	2025. 9	Scale	1:1	Material	PA66
					Color	Black
					Weight Kg	
					Pages	