

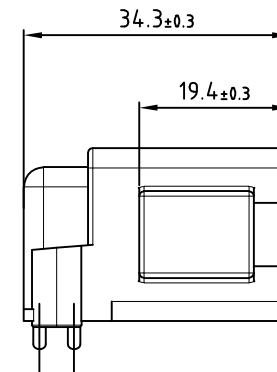
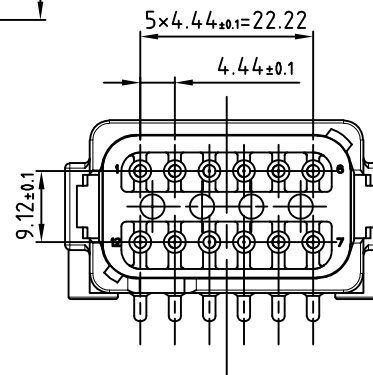

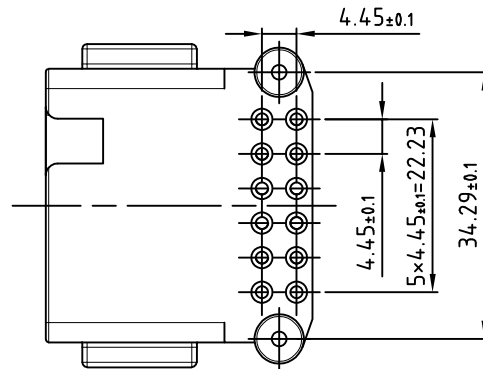


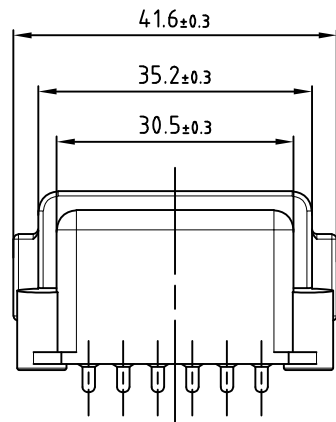

NOTES:

- 1.Rated current (maximum): 13A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.Pin plating: Tin over nickle over copper underplate (Sn/Ni/Cu) entire length of pin(RoHS COMPLIANT).
- 4.UL Flame resistance rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration (V):12 | 24

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025. 10	Revision	01	Name	Connector	
					DrawingNo	XTF13-12PC	
					Material	PA66+GF15	
Proofread	Yang	2025. 10			Color	Green	
Approval	Zhang	2025. 10	Scale	1.5:1	Weight Kg		
						Pages	