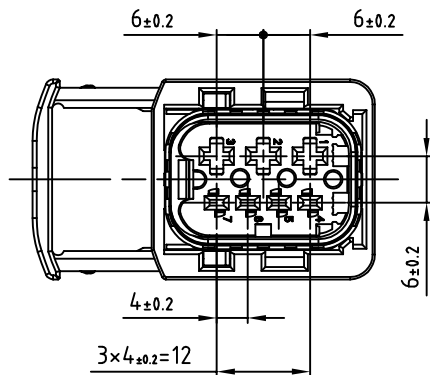


NOTES:

- 1.Rated current (maximum): 40A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.Moisture resistance:IP67.
- 4.UL Flame resistance rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):60
Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

					Name		Connector	
					DrawingNo		XF7071-1.5&2.8-21Gr	
					Material		PBT+GF30	
Design	Lai	2025.9	Revision	01	Color		Gray	
Proofread	Yang	2025.9			Weight Kg			
Approval	Zhang	2025.9	Scale	1:1			Pages	