


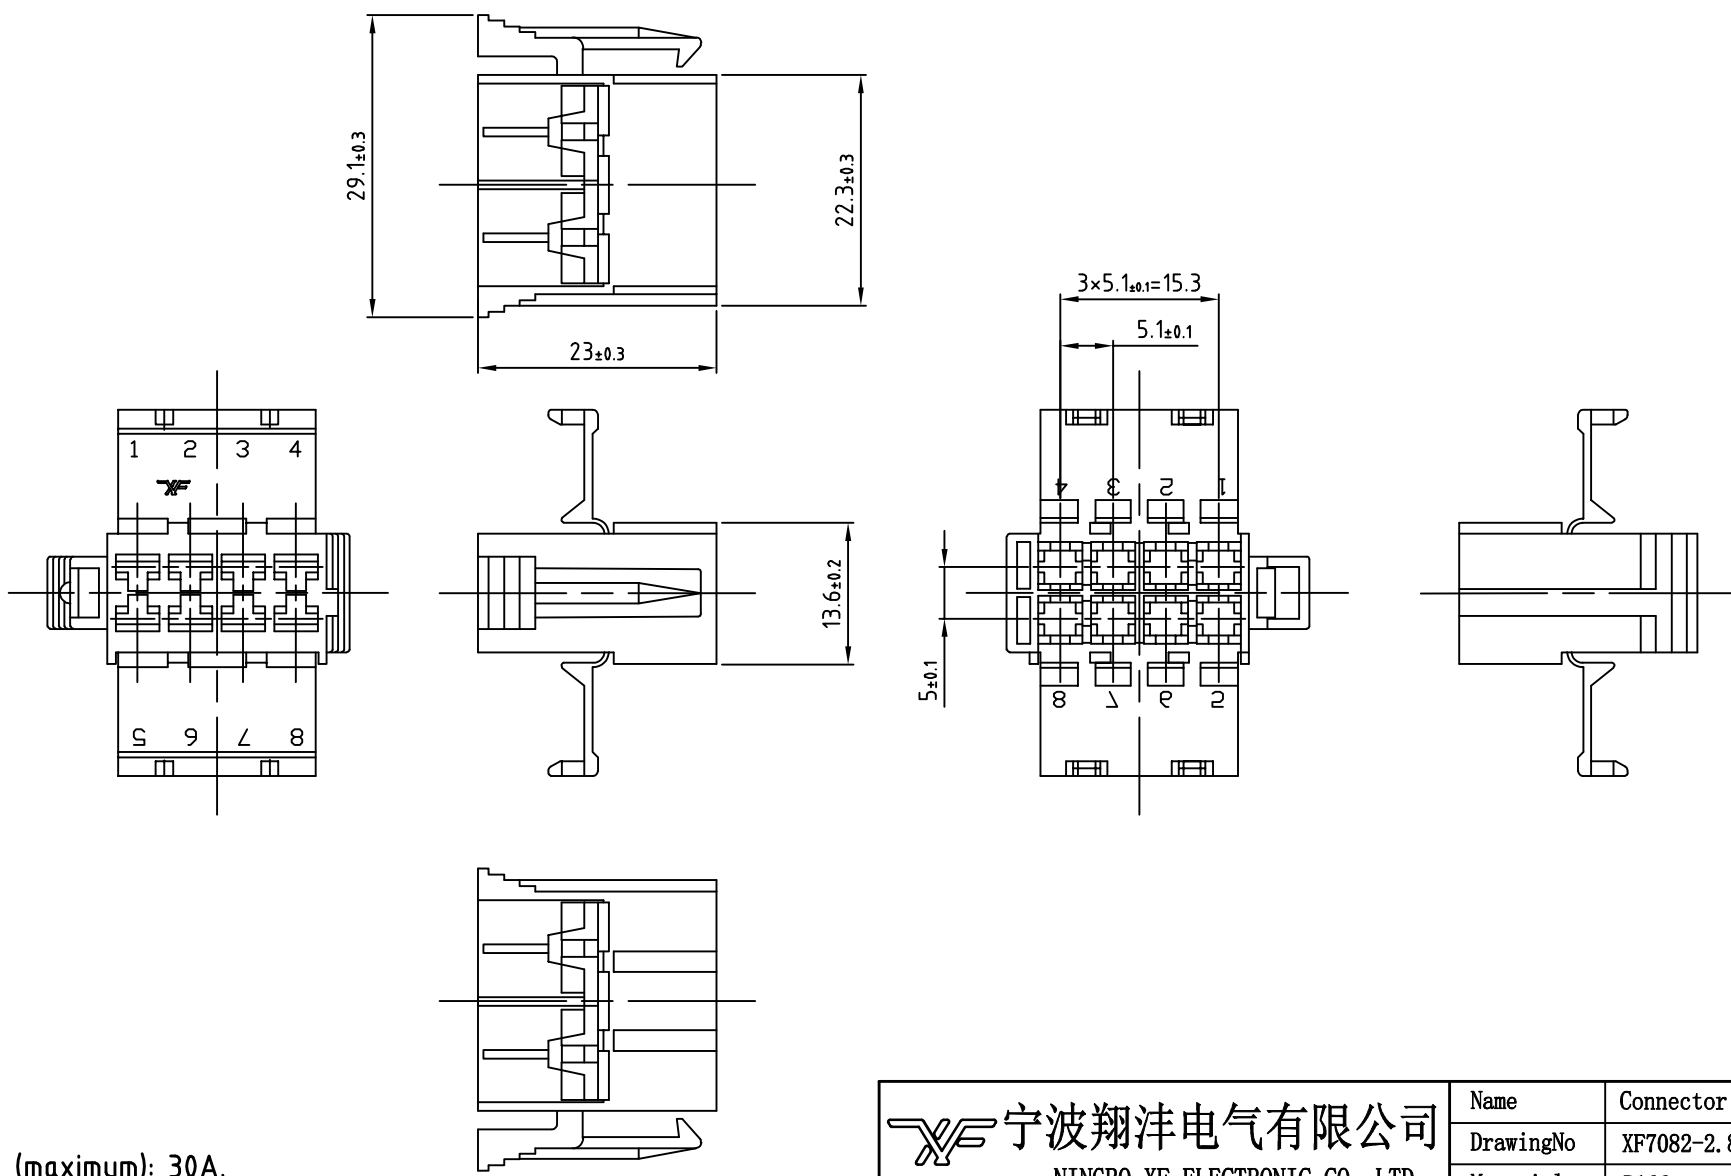

NOTES:

1. Rated current (maximum): 30A.
2. Working temperature range: -40°C TO $+120^{\circ}\text{C}$.
3. Rated voltage configuration (V): 12 | 24

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name		Connector	
					DrawingNo		XF7082-2. 8-21Ye	
					Material		PA66	
Design	Yang	2025. 10	Revision	01	Color		Yellow	
Proofread	Yang	2025. 10			Weight Kg			
Approval	Zhang	2025. 10	Scale	3:1			Pages	