


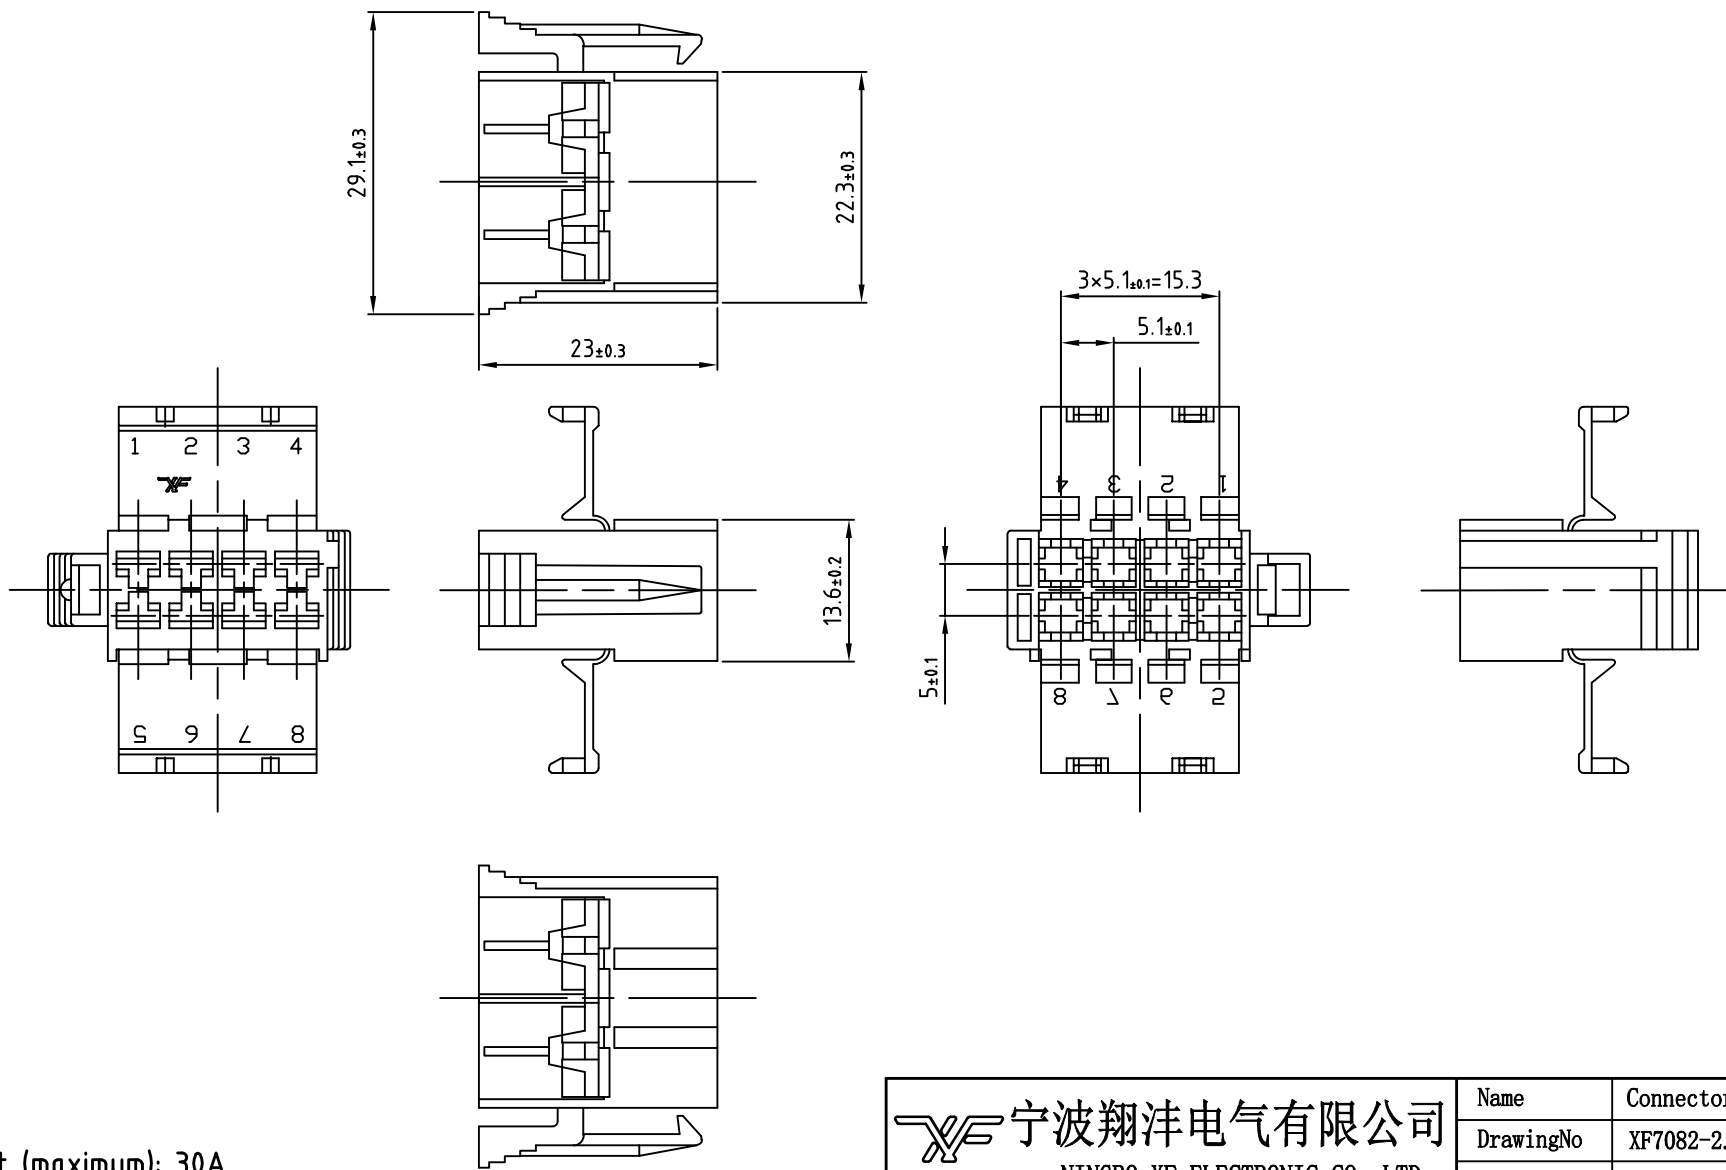

NOTES:

1. Rated current (maximum): 30A.
2. Working temperature range: -40°C TO $+120^{\circ}\text{C}$.
3. Rated voltage configuration (V): 12 | 24

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector		
					DrawingNo	XF7082-2. 8-21Br		
					Material	PA66		
Design	Yang	2025. 10	Revision	01	Color	Brown		
Proofread	Yang	2025. 10			Weight Kg			
Approval	Zhang	2025. 10	Scale	3:1		Pages		