


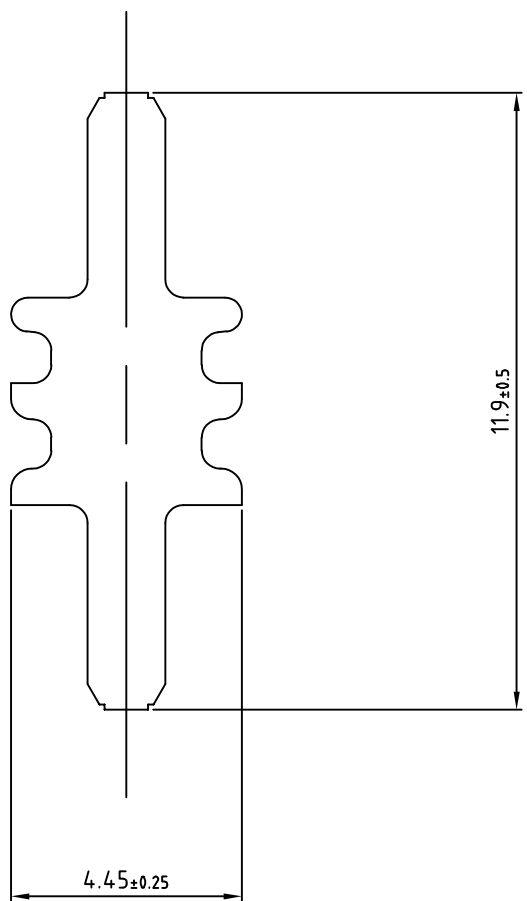

NOTES:

- 1.Shaw hardness:HS50±5.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.UL Flame resistance rating:UL-94 V0.
- 5.Environmental protection meets ROHS standard.

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Rubber stopper		
					DrawingNo	XF15305171		
					Material	Silicone		
Design	Lai	2025.10	Revision	01	Color	Green		
Proofread	Yang	2025.10			Weight Kg			
Approval	Zhang	2025.10	Scale	1:1		Pages		
		6		7		8		