

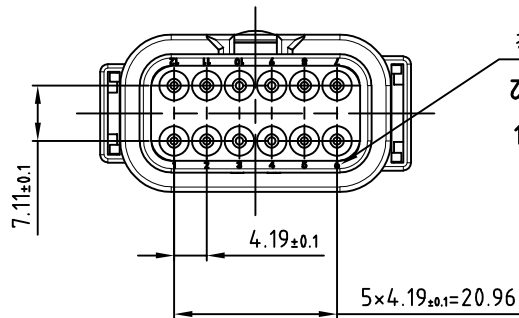
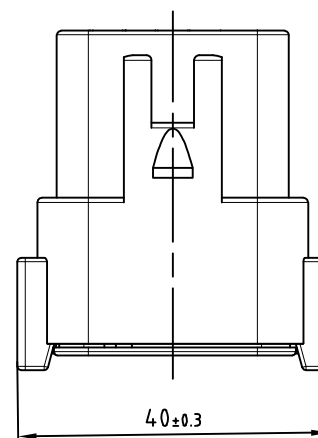
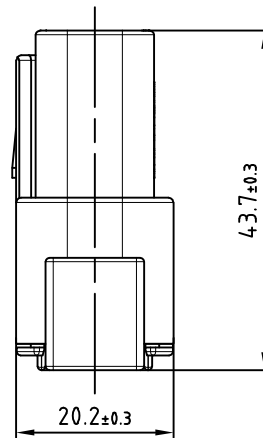
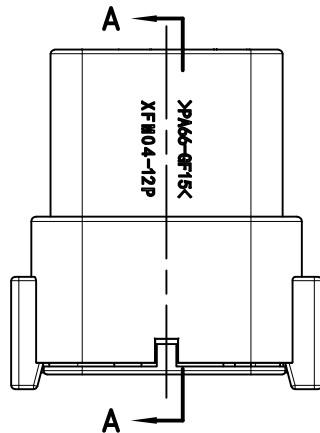


A-A

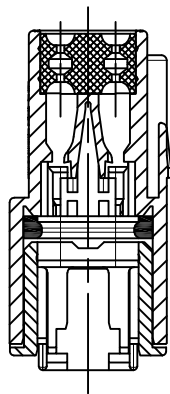

孔位顺序
21 11 01 6 8 L
1 2 3 4 5 6



- 注:
- 端子额定电流(最大值)(A):7.5A
 - 工作温度:-40℃~125℃
 - 防水:IP68、IP6K9K
 - UL阻燃性等级:UL-94 V0
 - 电气特征:工作电压(VDC):250
工作电压(VAC):250
标称电压架构(V):12|24|48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名称	连接件		
					型号	XTM04-12PD		
					材料	PA66+GF15		
设计	Lai	2025.10	标准化		颜色	棕色		
校对	Yang	2025.10			重量			
审核	Zhang	2025.10	比例	1.5:1	阶段标记		版次	01
未注公差: XX.X ±0.2;					A		页数	