

A

B

C

D

E

F

A


B

C






D

E


F

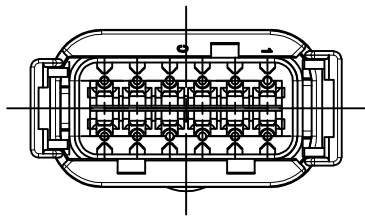

A-A

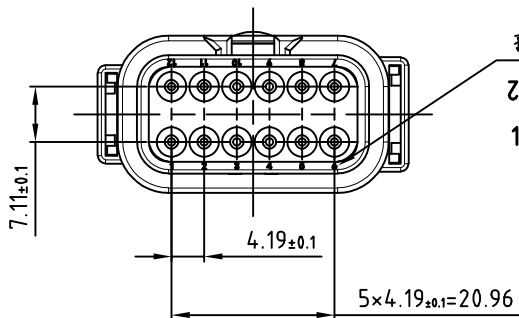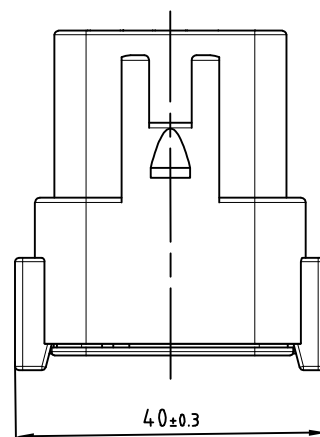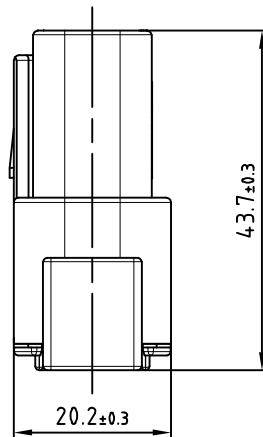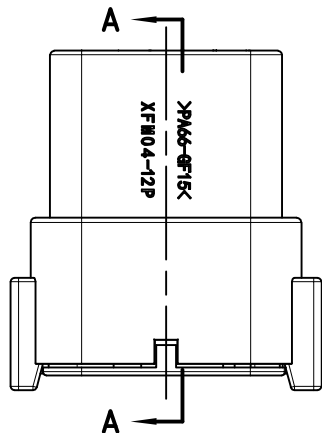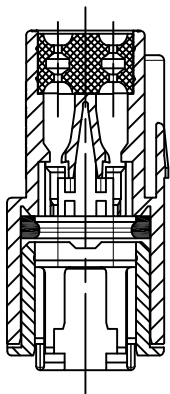

孔位顺序

12 11 10 9 8 7
1 2 3 4 5 6

注:

- 1、端子额定电流(最大值)(A):7.5A
- 2、工作温度:-40℃~125℃
- 3、防水:IP68、IP6K9K
- 4、UL阻燃性等级:UL-94 V0
- 5、电气特征:工作电压(VDC):250

工作电压(VAC):250

标称电压架构(V):12|24|48

 宁波翔洋电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名称	连接件		
					型号	XTMO4-12PC		
					材料	PA66+GF15		
设计	Lai	2025.10	标准化		颜色	绿色		
校对	Yang	2025.10			重量			
审核	Zhang	2025.10	比例	1.5:1	阶段标记	版次	01	
未注公差: XX.X ±0.2;					A	页数		