



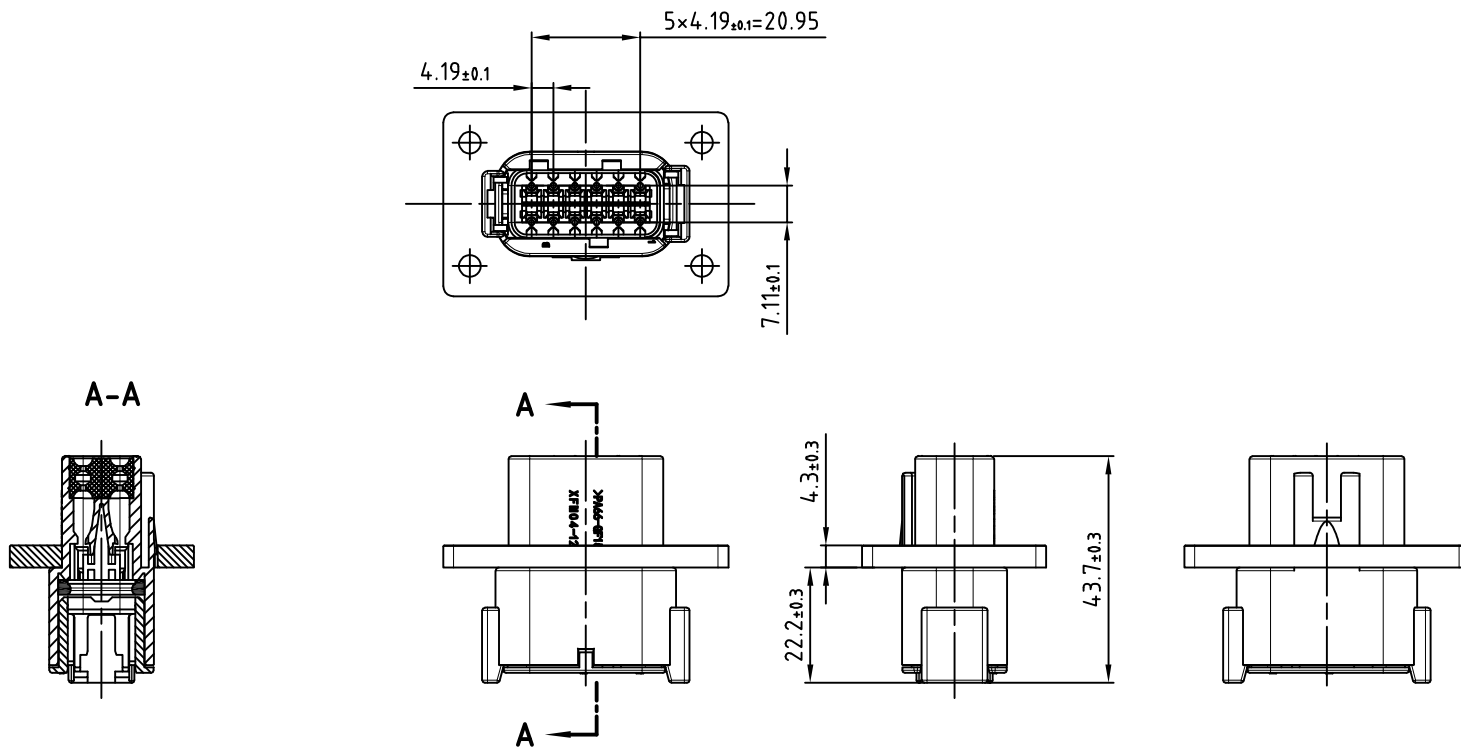


Hole sequence

21 11 01 6 8 7
1 2 3 4 5 6

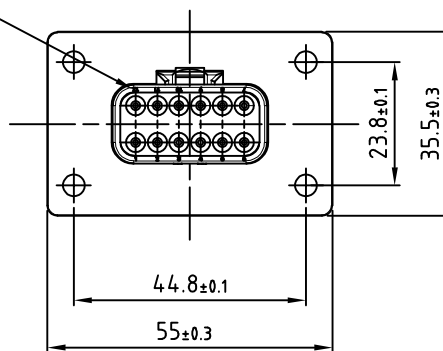

NOTES:

- Rated current (maximum): 7.5A.
- Working temperature range: -40°C TO $+125^{\circ}\text{C}$.
- Moisture resistance: IP68, IP6K9K.
- UL Flame resistance rating: UL-94 V0
- Electrical characteristics:
Working voltage (VDC): 250
Working voltage (VAC): 250
Rated voltage configuration (V): 12 | 24 | 48



 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name	Connector	
					DrawingNo	XTM04-12PB-L012	
					Material	PPA66+GF15	
Design	Lai	2025.10	Revision	01	Color	Black	
Proofread	Yang	2025.10			Weight Kg		
Approval	Zhang	2025.10	Scale	1.5:1		Pages	