


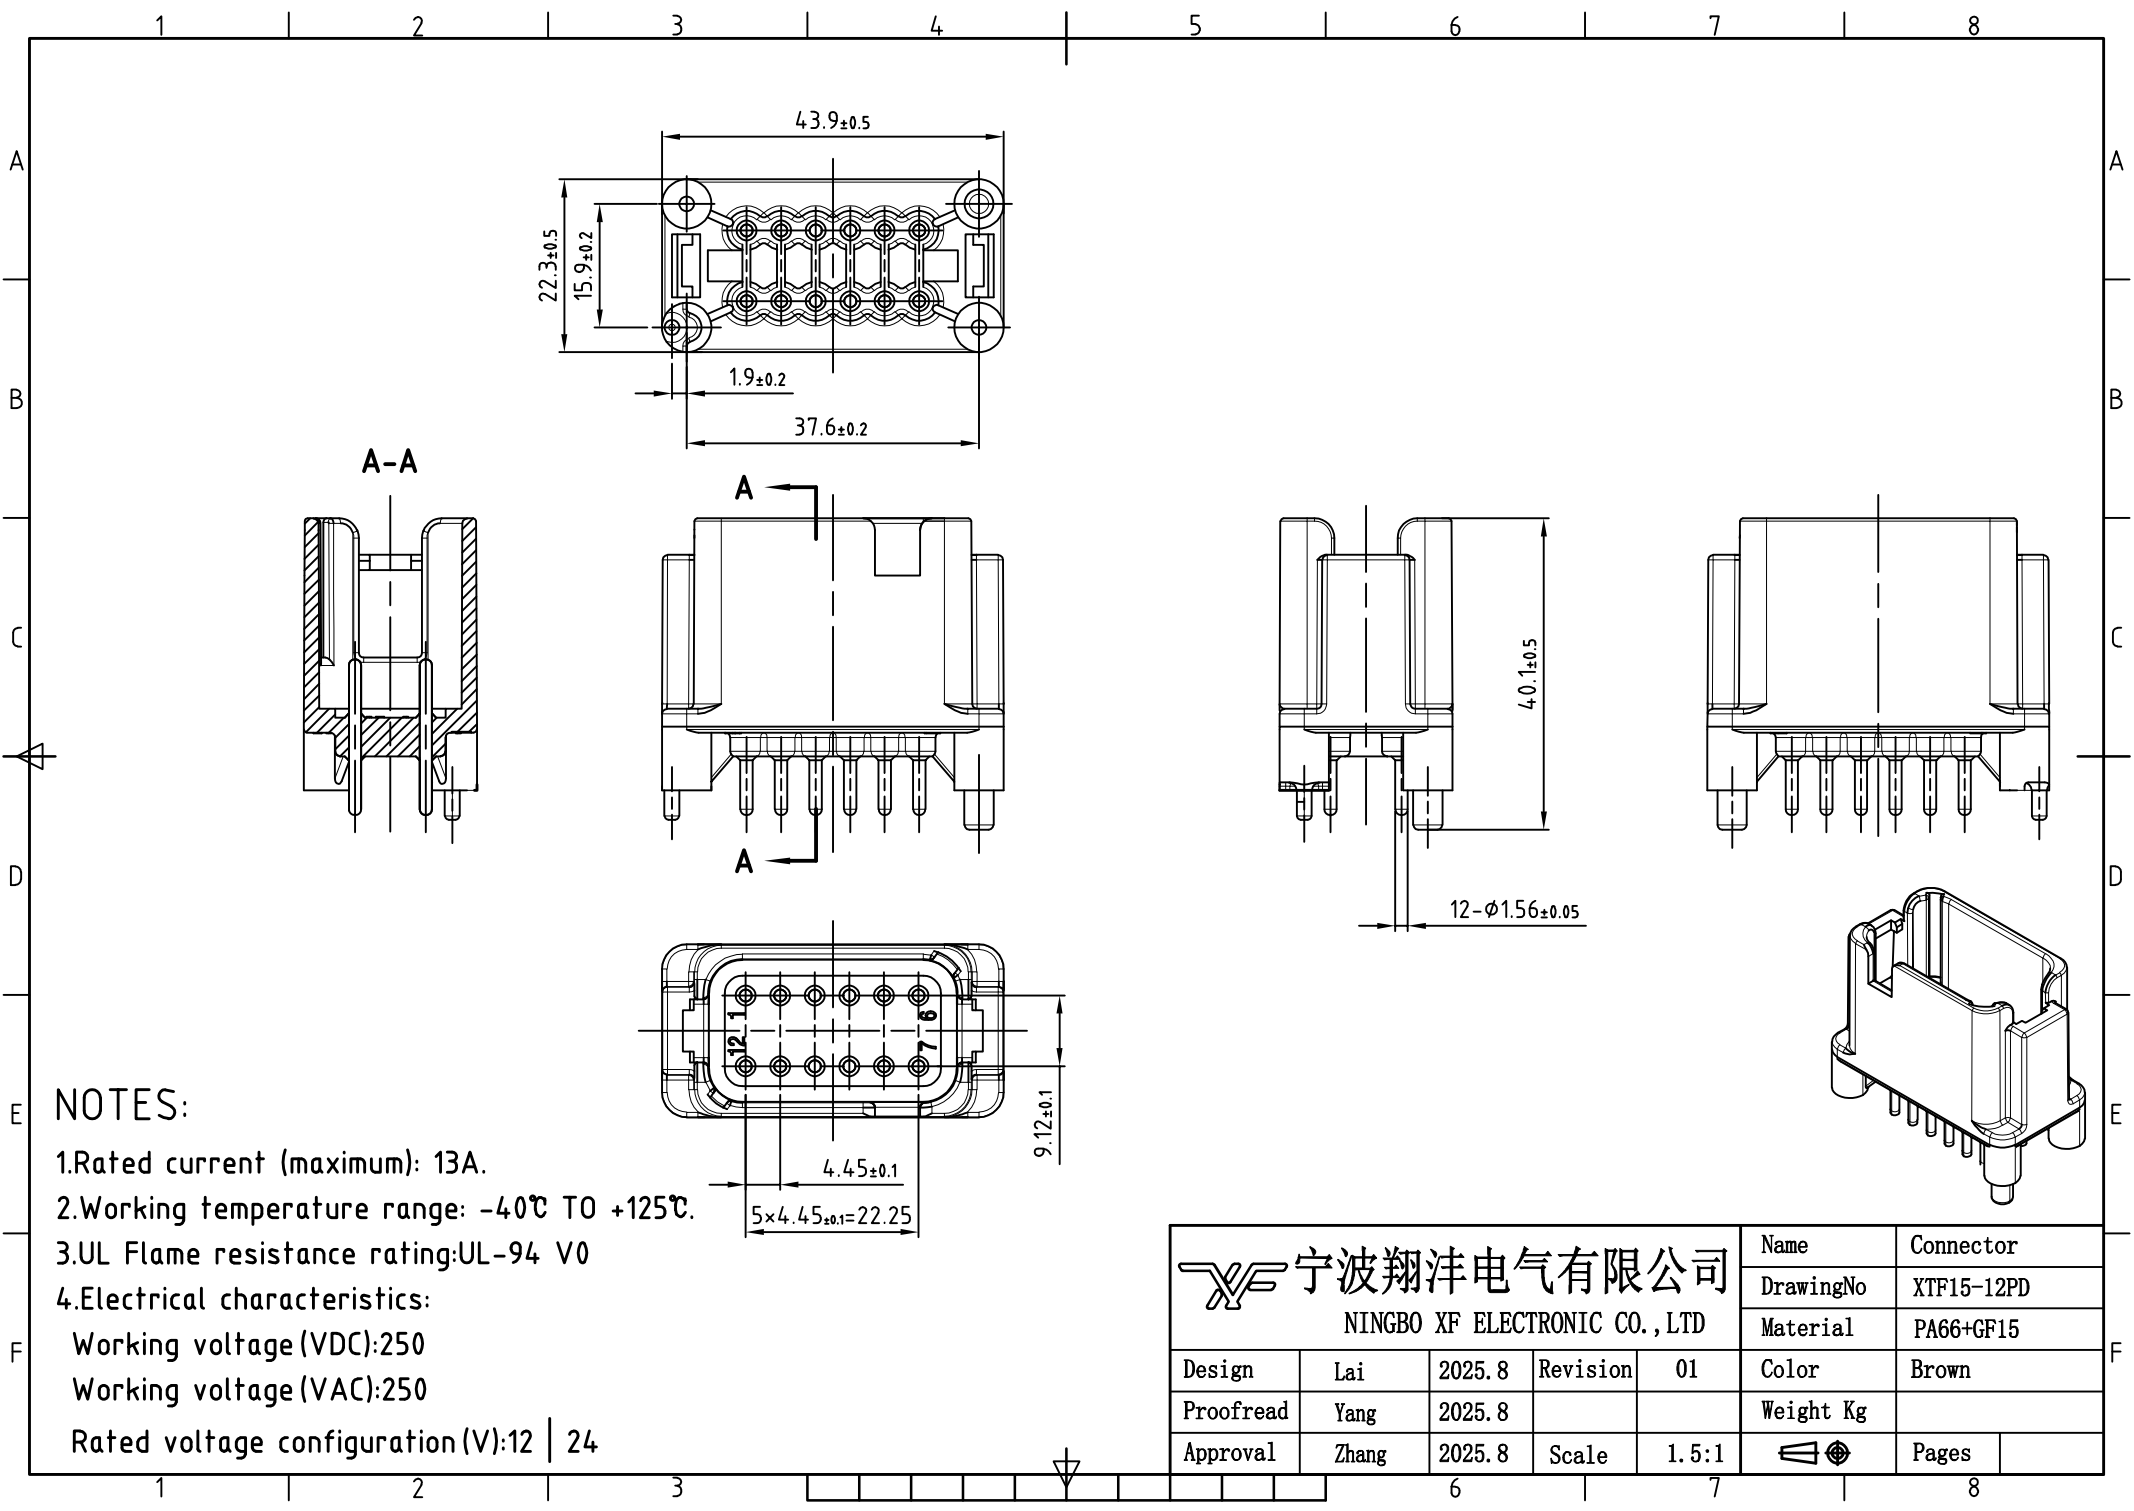

NOTES:

- 1. Rated current (maximum): 13A.
- 2. Working temperature range: -40°C TO $+125^{\circ}\text{C}$.
- 3. UL Flame resistance rating: UL-94 V0
- 4. Electrical characteristics:
 - Working voltage (VDC): 250
 - Working voltage (VAC): 250
 - Rated voltage configuration (V): 12 | 24

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XTF15-12PD	
					Material	PA66+GF15	
Design	Lai	2025.8	Revision	01	Color	Brown	
Proofread	Yang	2025.8			Weight Kg		
Approval	Zhang	2025.8	Scale	1.5:1		Pages	