

A

B

C

D

E

F

A


B

C






D

E

F

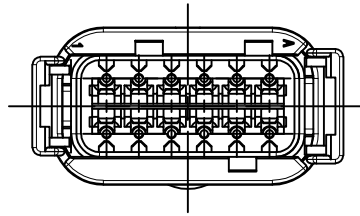


A-A

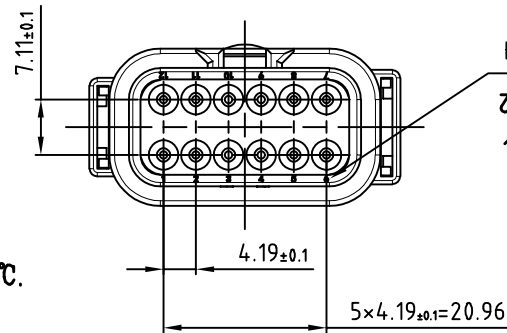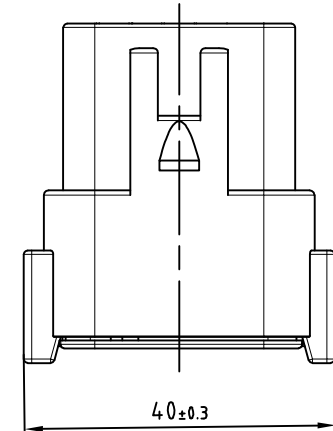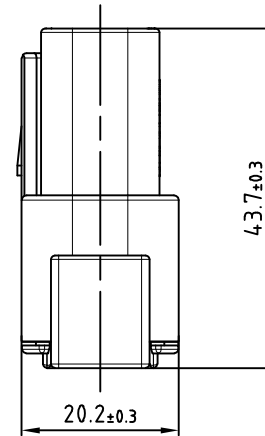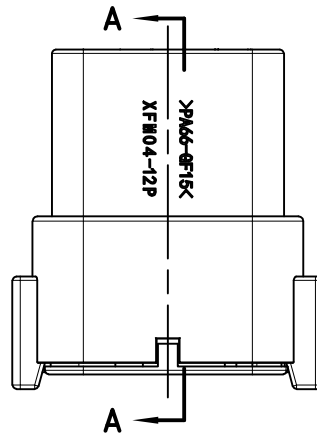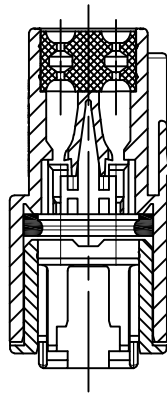

Hole sequence

21 11 01 6 8 L
1 2 3 4 5 6



NOTES:

- 1.Rated current (maximum):7.5A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.Moisture resistance:IP68,IP6K9K.
- 4.UL Flame resistance rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration (V):12 | 24 | 48

 宁波翔洋电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025.10	Revision	01
Proofread	Yang	2025.10		
Approval	Zhang	2025.10	Scale	1.5:1

Name	Connector	
DrawingNo	XTM04-12PA	
Material	PPA66+GF15	
Color	Gray	
Weight Kg		
Pages		