
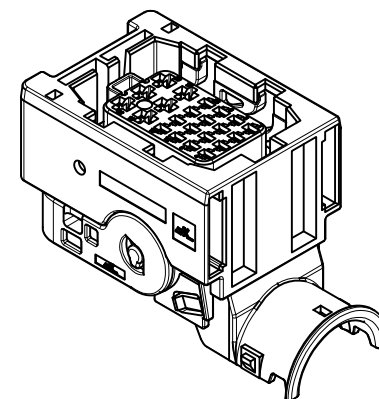
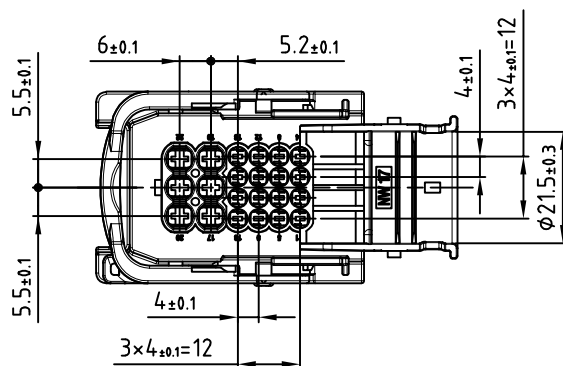
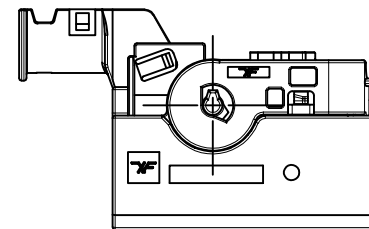

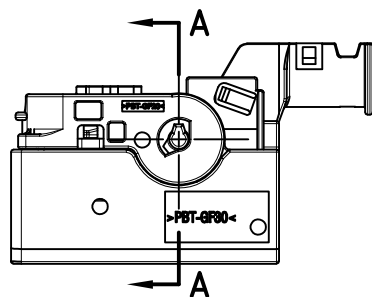



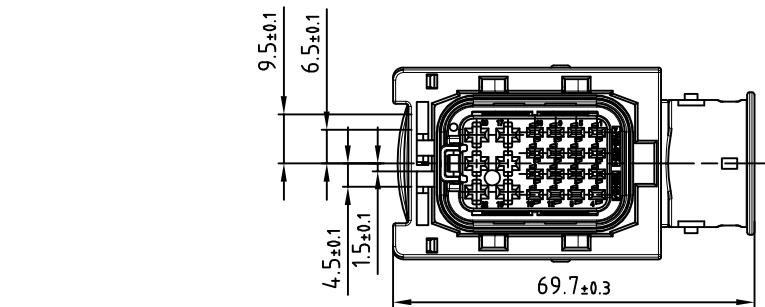

NOTES:

1. CURRENT RATING: 20A, 30A.
2. OPERATING TEMPERATURE: -40℃ TO +120℃.
3. MOISTURE RESISTANCE: IP67, IP69K.

宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025. 4	Revision	01
Proofread	Yang	2025. 4		
Approval	Zhang	2025. 4	Scale	1:1

Name	Connector
DrawingNo	XF7221-1. 5&2. 8-21Blu
Material	PBT+GF
Color	Blue
Weight Kg	
Pages	