

A

B

C

D

E

F

A


B

C







D

E

F

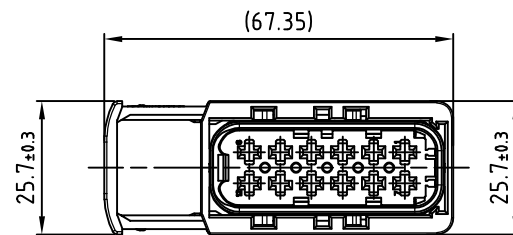

A-A

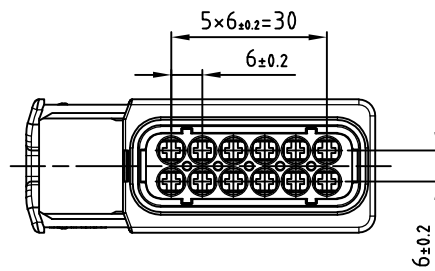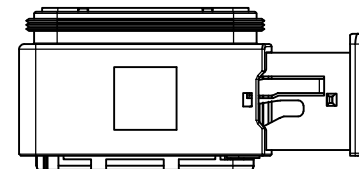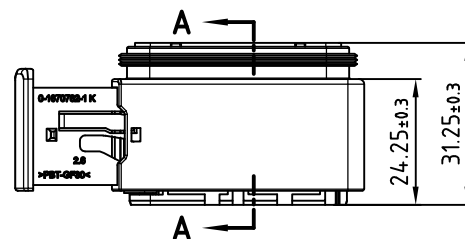

## NOTES:

- 1.Rated current (maximum): 40A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.Moisture resistance:IP67.
- 4.UL Flame resistance rating:UL-94 HB
- 5.Electrical characteristics:  
Working voltage(VDC):60  
Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司  
NINGBO XF ELECTRONIC CO.,LTD

|           |       |         |          |     |                                                                                       |       |  |
|-----------|-------|---------|----------|-----|---------------------------------------------------------------------------------------|-------|--|
| Design    | Lai   | 2025.10 | Revision | 01  | Color                                                                                 | Black |  |
| Proofread | Yang  | 2025.10 |          |     | Weight Kg                                                                             |       |  |
| Approval  | Zhang | 2025.10 | Scale    | 1:1 |  | Pages |  |