
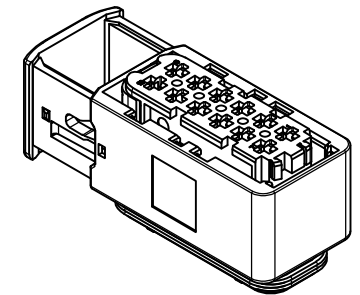
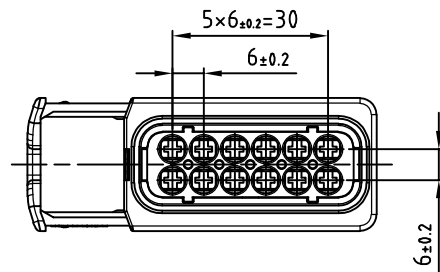
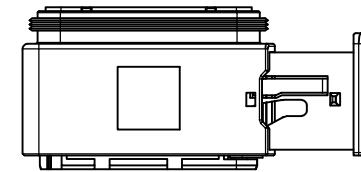

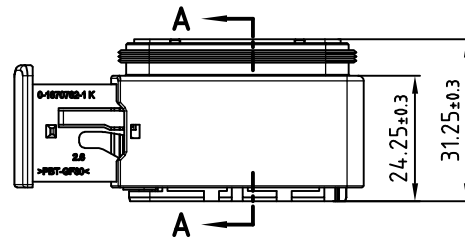


A-A



NOTES:

- 1.Rated current (maximum): 40A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.Moisture resistance:IP67.
- 4.UL Flame resistance rating:UL-94 HB
- 5.Electrical characteristics:
Working voltage(VDC):60
Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XF7121-2.8-21Blu	
					Material	PBT+GF30	
Design	Lai	2025.10	Revision	01	Color	Blue	
Proofread	Yang	2025.10			Weight Kg		
Approval	Zhang	2025.10	Scale	1:1		Pages	