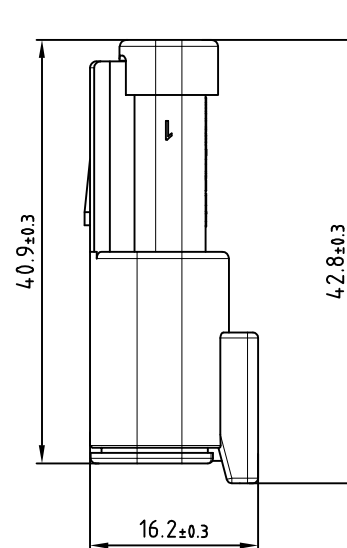
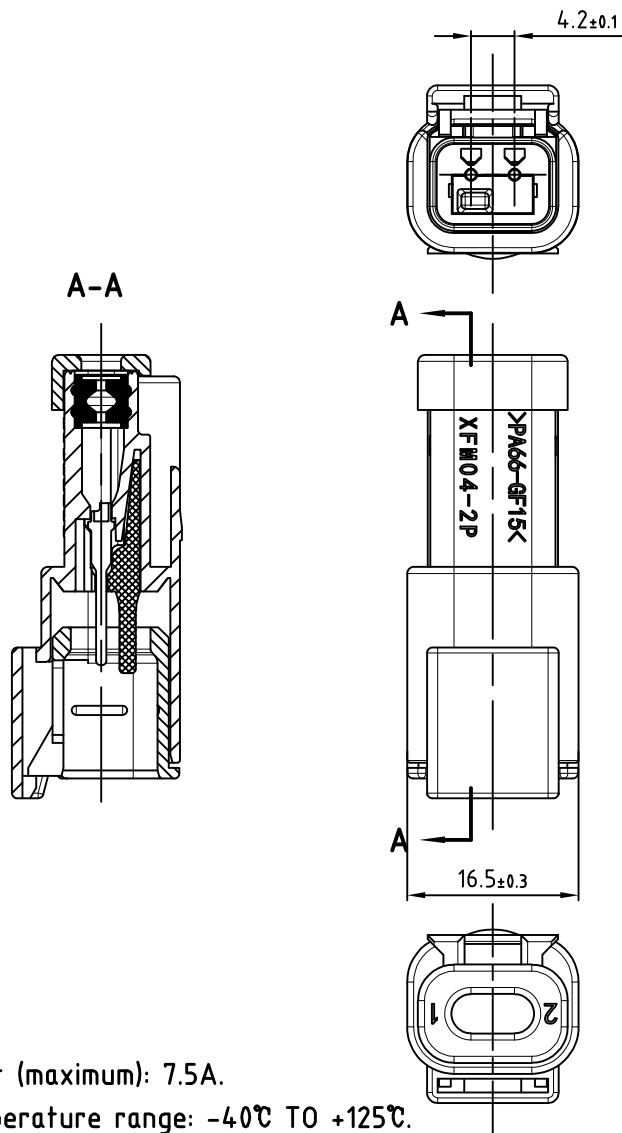


## NOTES:

- 1.Rated current (maximum): 7.5A.
- 2.Working temperature range:  $-40^{\circ}\text{C}$  TO  $+125^{\circ}\text{C}$ .
- 3.Moisture resistance:IP68,IP6K9K.
- 4.UL Flame resistance rating:UL-94 V0
- 5.Electrical characteristics:  
Working voltage (VDC):250  
Working voltage (VAC):250  
Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司  
NINGBO XF ELECTRONIC CO.,LTD

|           |       |          |          |     |                                                                                       |       |  |
|-----------|-------|----------|----------|-----|---------------------------------------------------------------------------------------|-------|--|
| Design    | Lai   | 2025. 11 | Revision | 01  | Color                                                                                 | Black |  |
| Proofread | Yang  | 2025. 11 |          |     | Weight Kg                                                                             |       |  |
| Approval  | Zhang | 2025. 11 | Scale    | 2:1 |  | Pages |  |