

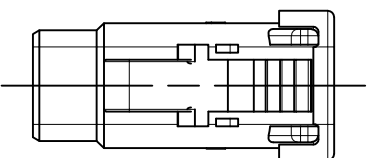
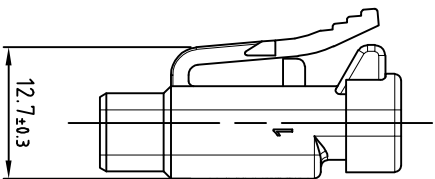
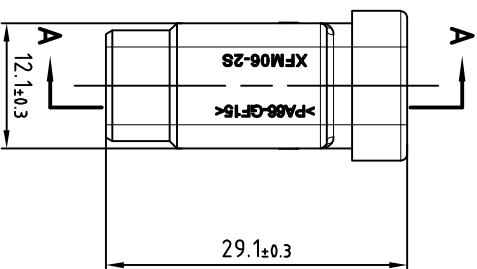


A-A



NOTES:

- 1.CURRENT RATING:7.5A MAXIMUM.
- 2.OPERATING TEMPERATURE: -40℃ TO +125℃.
- 3.MOISTURE RESISTANCE:IP68,IP6K9K.
- 4.UL Flame Resistance Rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration V):12 | 24 | 48

宁波翔沅电气有限公司

NINGBO XF ELECTRONIC CO., LTD

NINGBO XF ELECTRONIC CO., LTD			Name			Connector		
Design	Lai	2025. 8	Revision	01	Color	Grey	Material	PA66+GF15
Proofread	Yang	2025. 8			Weight Kg		DrawingNo	XTM06-2S-E003
Approval	Zhang	2025. 8	Scale	2:1				