


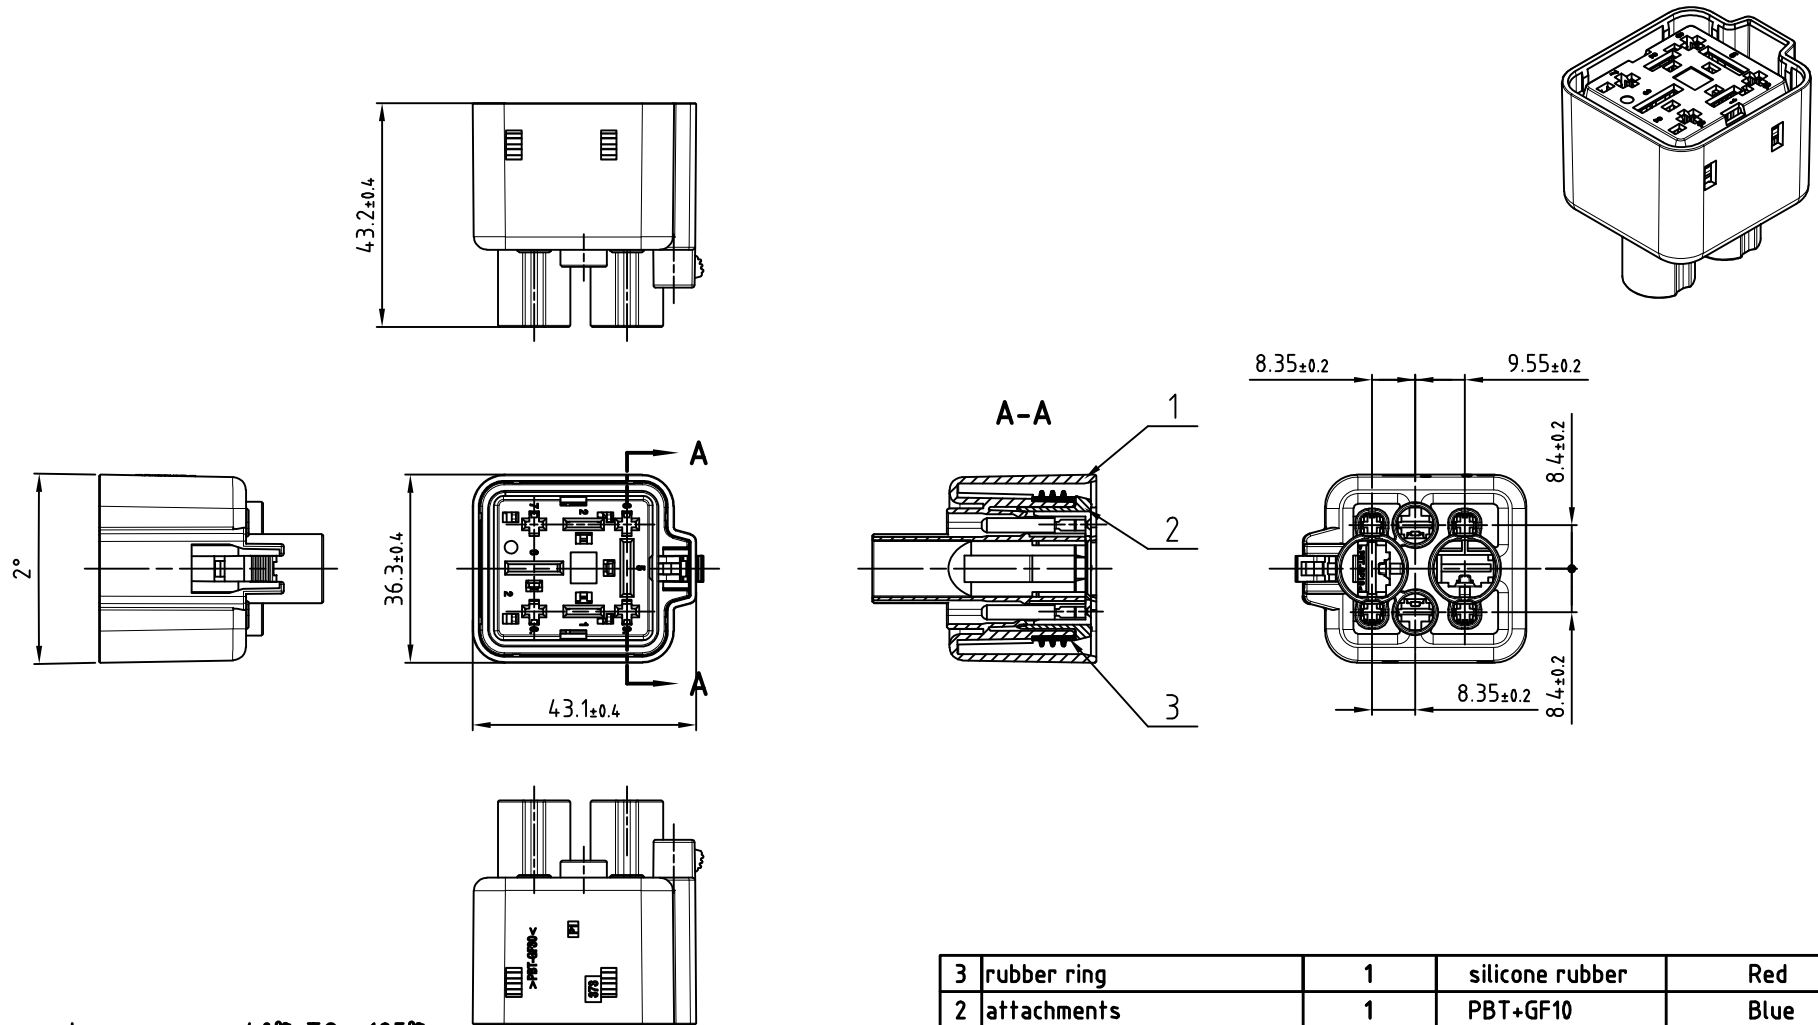

NOTES:

- 1.Working temperature range: -40℃ TO +125℃.
- 2.UL Flame resistance rating:UL-94 HB.
- 3.OEM:10740372 (60431011) ,2.8-6.3-9.5 housing.
- 4.The font height is 0.1mm.
- 5.There is no bad injection molding, crush, deformation and so on on the surface of the product.
- 6.The product surface should include information such as mold code.

3	rubber ring		1	silicone rubber		Red			
2	attachments		1	PBT+GF10		Blue			
1	main body		1	PBT+GF30		Black			
No.	Name		Quantity		Material		Color		
 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name		Connector		
					DrawingNo		XF7081-2. 8&6. 3&9. 5-21Blu		
					Material		PBT+GF30\ PBT+GF10		
Design	Zhang	2025. 10	Revision	01		Color		Black+BLUE	
Proofread	Yang	2025. 10			Weight Kg				
Approval	Zhang	2025. 10	Scale	1:1				Pages	