

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8

A

A

B

B

C

C

D

D

NOTES:

- 1.CURRENT RATING: 7.5A MAXIMUM.
- 2.OPERATING TEMPERATURE: -40°C TO +125°C.
- 3.MOISTURE RESISTANCE:IP68,IP6K9K.
- 4.UL Flame Resistance Rating:UL-94 V0







5.Electrical characteristics:

Working voltage (VDC):250

Working voltage (VAC):250

Rated voltage configuration V):12 | 24 | 48

6.Internal resistor:110Ωmin,120Ωnom,130Ωmax,0.4W min.

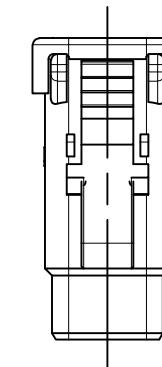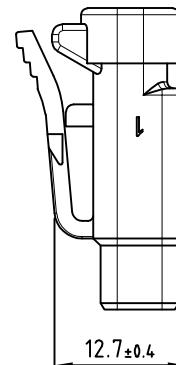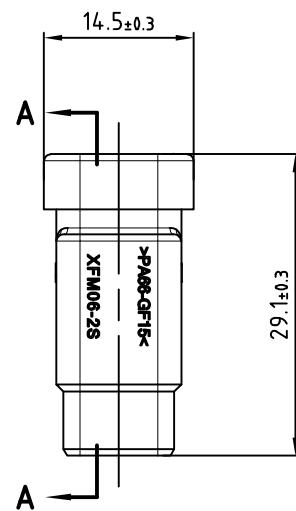

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

Name	Connector			
DrawingNo	XTM06-2S-P006			
Material	PA66+GF			
Design	Lai	2025.7	Revision	01
Proofread	Yang	2025.7		
Approval	Zhang	2025.7	Scale	2:1
Color	Grey			
Weight Kg				
Pages				

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8