

A

B

C

D

E

F

A


B

C







D

E

F



A-A

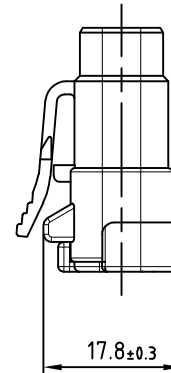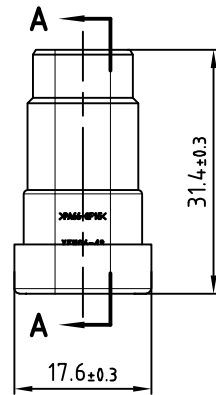

NOTES:

- 1.Rated current (maximum): 7.5A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.Moisture resistance:IP68,IP6K9K.
- 4.UL Flame resistance rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration (V):12

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025.11	Revision	01
Proofread	Yang	2025.11		
Approval	Zhang	2025.11	Scale	1.5:1

Name	Connector	
DrawingNo	XTM06-4S-E003	
Material	PA66+GF15	
Color	Grey	
Weight Kg		
Pages		