

A

B

C

D

E

F

A








B

C

D

E

F

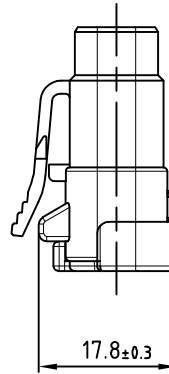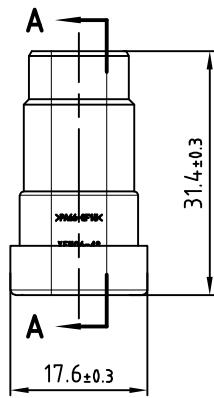

- 注:
- 1、端子额定电流(最大值) (A):7.5A
 - 2、工作温度:-40℃~125℃
 - 3、防水:IP68、IP6K9K
 - 4、UL阻燃性等级:UL-94 V0
 - 5、电气特征:工作电压 (VDC):250
工作电压 (VAC):250
标称电压架构 (V):12

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名称	连接件		
					型号	XTM06-4S-E003		
					材料	PA66+GF15		
设计	Lai	2025.11	标准化		颜色	灰色		
校对	Yang	2025.11			重量			
审核	Zhang	2025.11	比例	1.5:1	阶段标记	版次	01	
未注公差: XX.X ±0.2;					A	页数		