

A

B

C

D

E

F

A








B

C

D

E

F

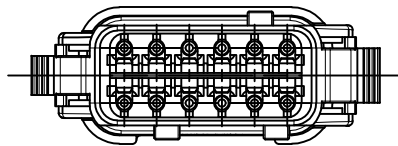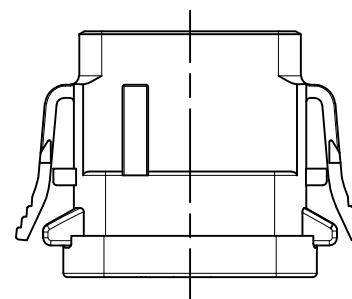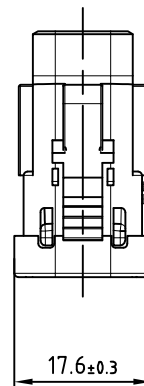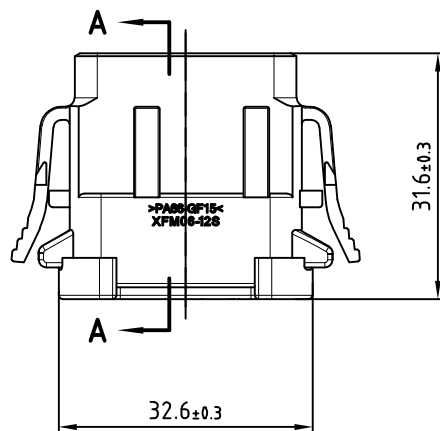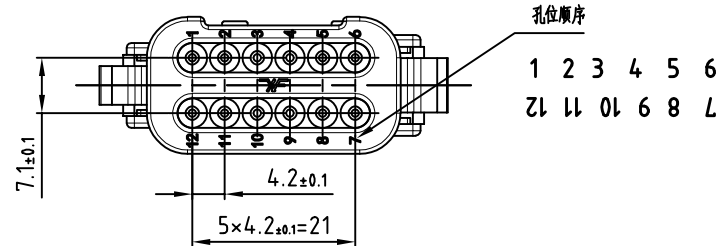

注:

- 1、端子额定电流(最大值) (A):7.5A
- 2、工作温度:-40℃~125℃
- 3、防水:IP68、IP6K9K
- 4、UL阻燃性等级:UL-94 V0
- 5、电气特征:工作电压 (VDC):250

工作电压 (VAC):250

标称电压架构 (V):12|24|48

宁波翔洋电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

设计	Lai	2025.7	标准化	
校对	Yang	2025.7		
审核	Zhang	2025.7	比例	1.5:1
未注公差: XX.X ±0.2;			A	

名称	连接件		
型号	XTM06-12SA-E003		
材料	PA66+GF15		
颜色	灰色		
重量			
阶段标记	版次	01	
A	页数		