


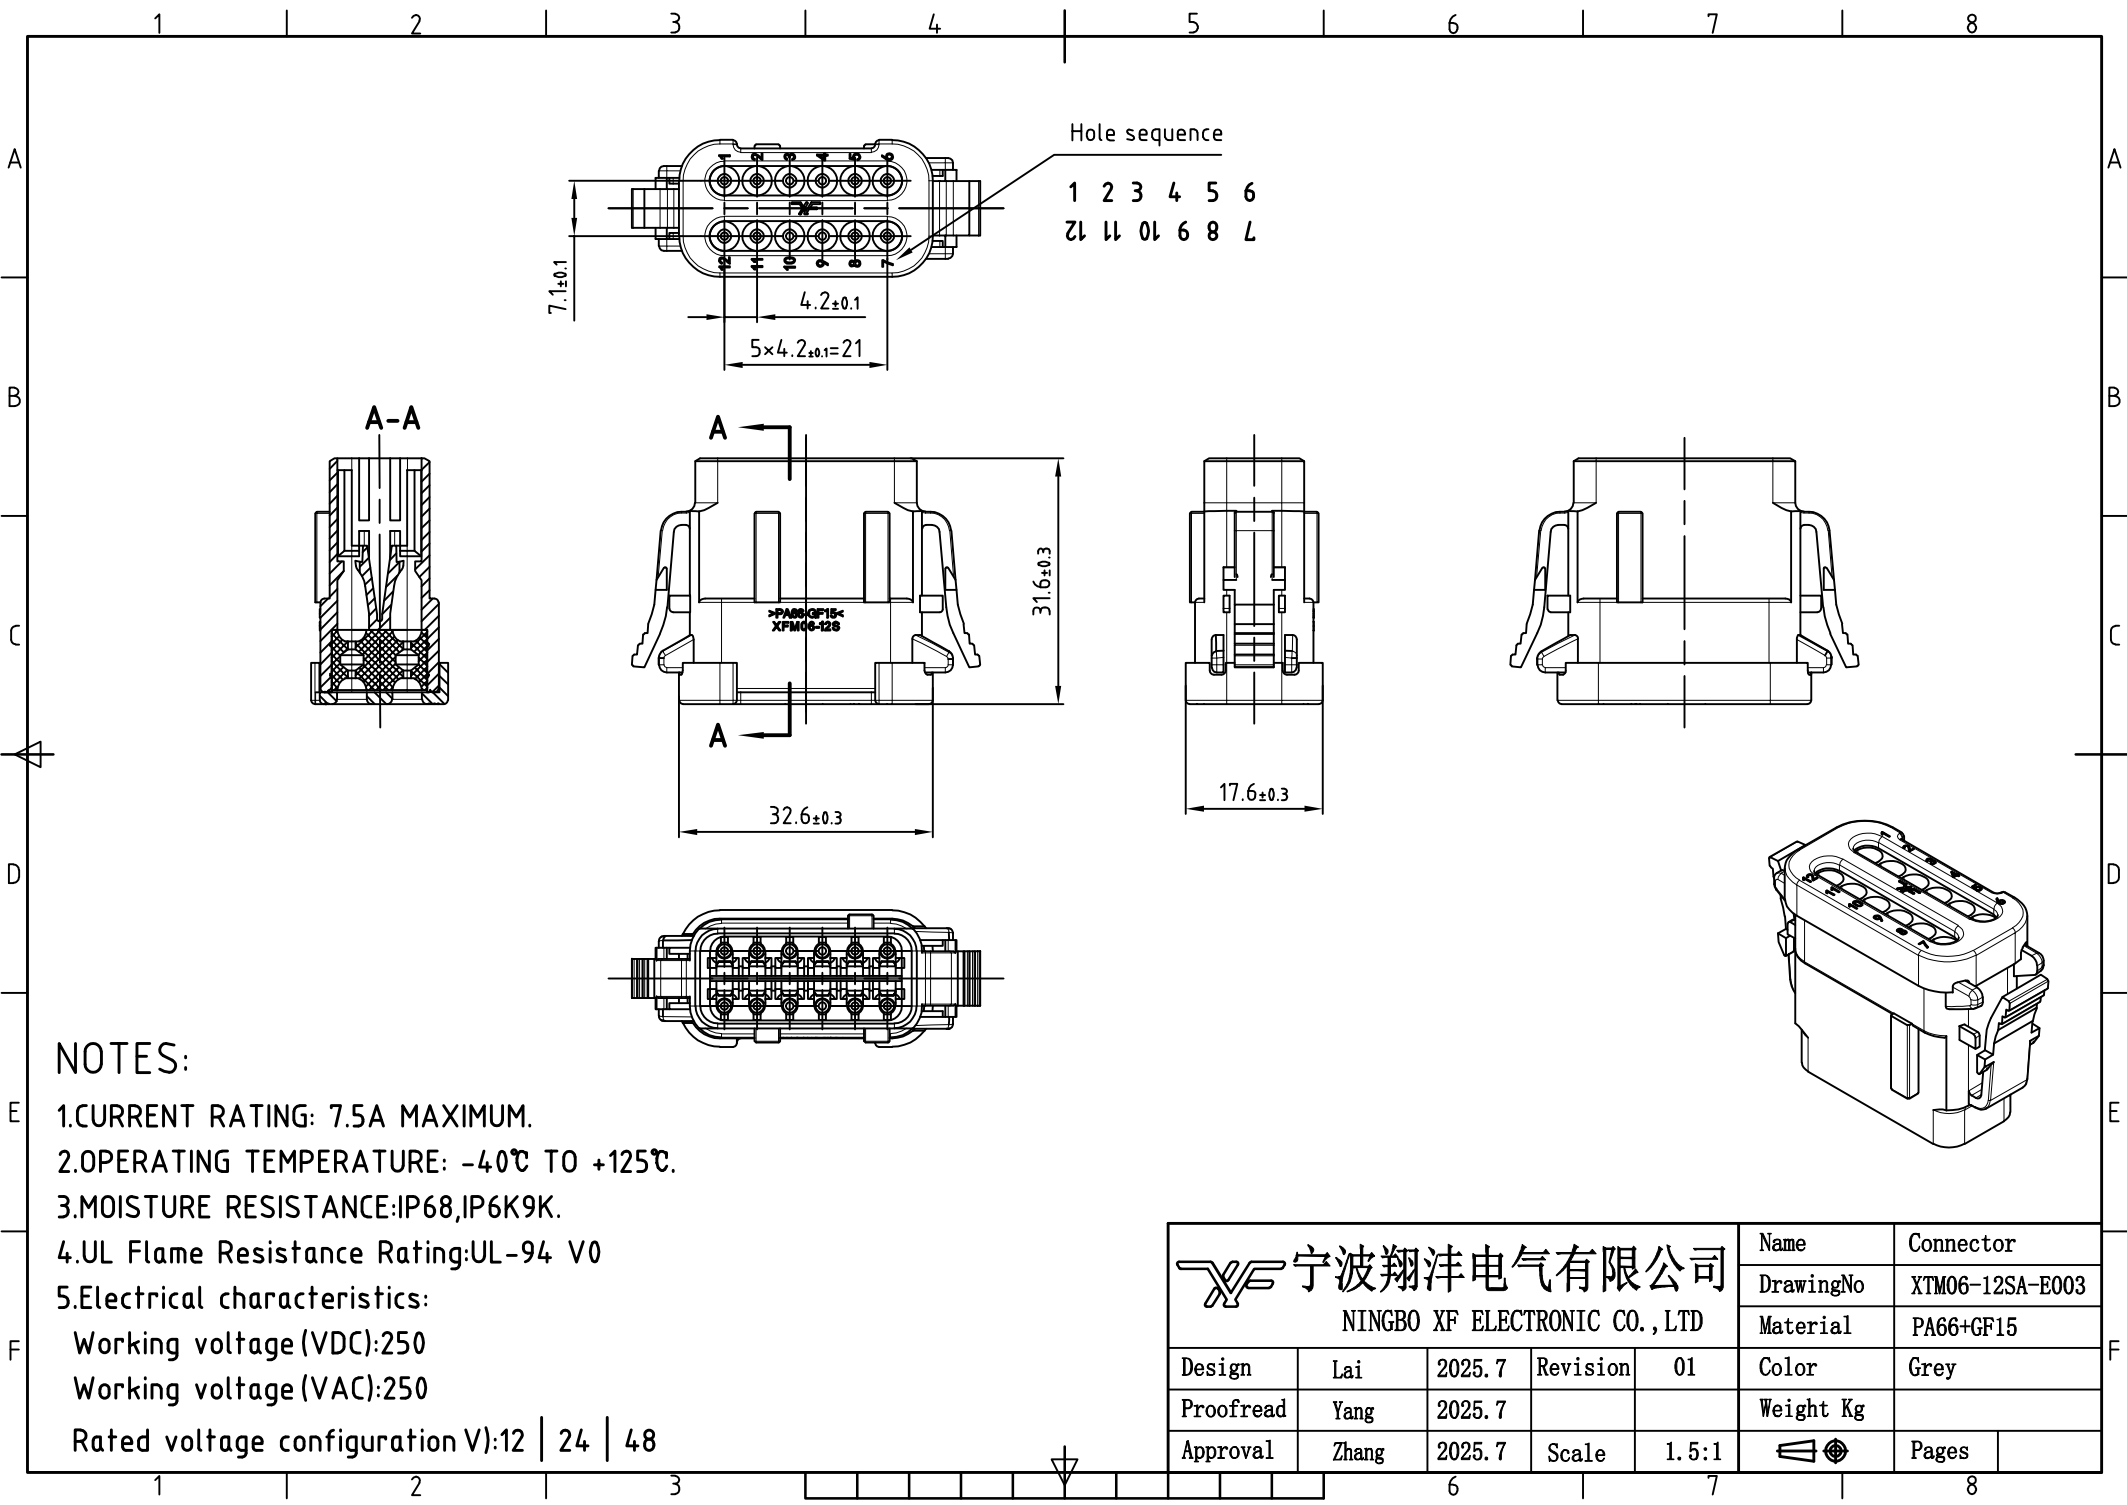

NOTES:

- 1.CURRENT RATING: 7.5A MAXIMUM.
- 2.OPERATING TEMPERATURE: -40°C TO $+125^{\circ}\text{C}$.
- 3.MOISTURE RESISTANCE:IP68,IP6K9K.
- 4.UL Flame Resistance Rating:UL-94 V0
- 5.Electrical characteristics:
 - Working voltage (VDC):250
 - Working voltage (VAC):250
 - Rated voltage configuration V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XTM06-12SA-E003	
					Material	PA66+GF15	
Design	Lai	2025. 7	Revision	01	Color	Grey	
Proofread	Yang	2025. 7			Weight Kg		
Approval	Zhang	2025. 7	Scale	1. 5 : 1		Pages	