

A

B

C

D

E

F

A








B

C

D

E

F

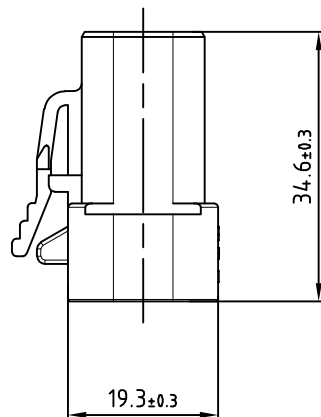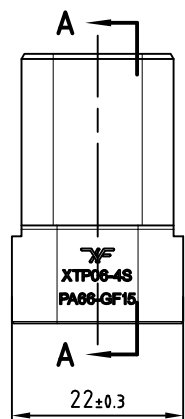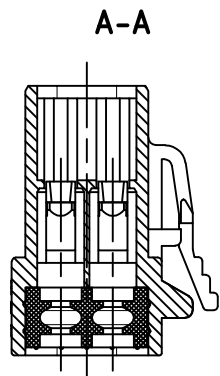

注:

- 1、端子额定电流(最大值) (A):25A
- 2、工作温度:-40℃~125℃
- 3、防水:IP68、IP6K9K
- 4、UL阻燃性等级:UL-94 V0
- 5、电气特征:工作电压 (VDC):200

工作电压 (VAC):200

标称电压架构 (V):12|24

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名 称	连接件		
					型 号	XTP06-4S-C015		
					材 料	PA66+GF15		
设 计	Zhang	2025. 11	标准化		颜 色	灰色		
校 对	Yang	2025. 11			重 量			
审 核	Zhang	2025. 11	比 例	1.5:1	阶段标记	版 次	01	
未注公差: XX.X ±0.2;					A	页 数		