
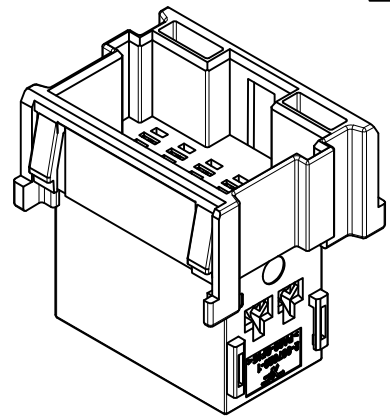


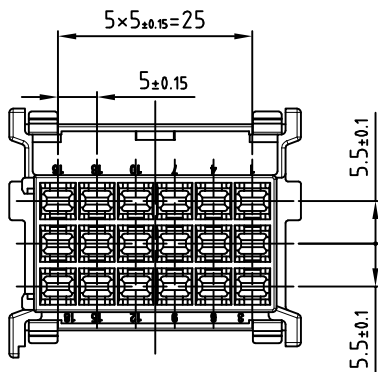
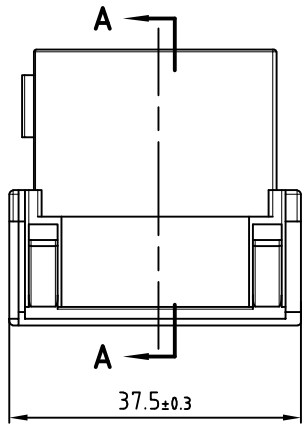





注:

- 1、工作温度: -40℃~125℃
- 2、UL阻燃性等级: UL-94 HB
- 3、电气特征: 工作电压 (VDC): 28

标称电压架构 (V): 12|24

4、OEM: 2-967629-1

 宁波翔洋电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名 称		连接件		
					型 号		XF7181-2.8-11Wt		
					材 料		PA66+GF13		
设 计	Lai	2025.11	标准化		颜 色		白色		
校 对	Yang	2025.11			重 量				
审 核	Zhang	2025.11	比 例	1.5:1	阶段标记		版 次		01
未注公差: XX.X ±0.2;					A			页 数	
			6		7			8	