

A

B

C

D

E

F

A

B








C

D

E

F

A-A

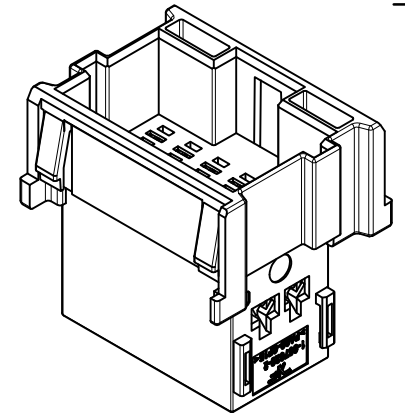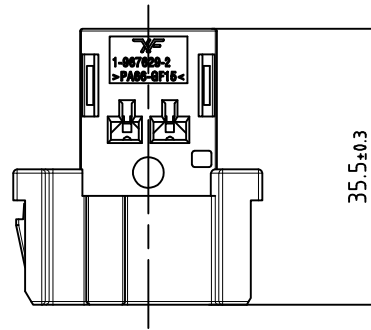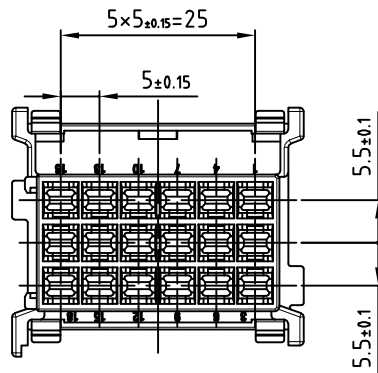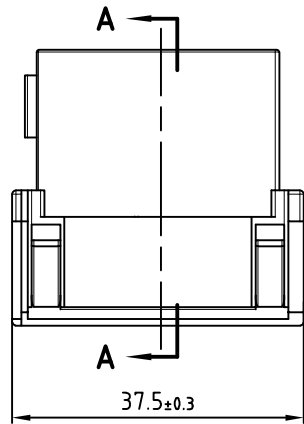

注:

1、工作温度:-40℃~125℃

2、UL阻燃性等级:UL-94 HB

3、电气特征:工作电压(VDC):28

标称电压架构(V):12|24

4、OEM:1-967629-2

宁波翔洋电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

设计	Lai	2025.11	标准化	
校对	Yang	2025.11		
审核	Zhang	2025.11	比例	1.5:1
未注公差: XX.X ±0.2;				

名称	连接件		
型号	XF7181-2.8-11Pur		
材料	PA66+GF13		
颜色	紫色		
重量			
阶段标记	版次	01	
A	页数		